


MATERIAL △C
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze


ORDER INFORMATION

5 P S 2 S D A 4 3 - 2 X X X X N X X X U - 0 0

2: Dual Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" ◎S0:Selective SA:5u" SB:10u" SC:20u" SD:30u" T0:Tin Plated TE:Tin 200u"	N:W/O Peg N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap N:Non Type	RoHS
-------------	------------------------------	--	-----------------------------	---	------

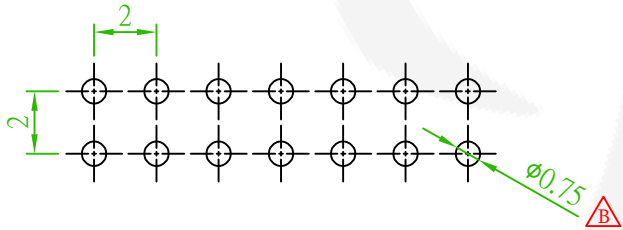

Recommended PCB Layout
(PCB TOLERANCE ±0.05) △B

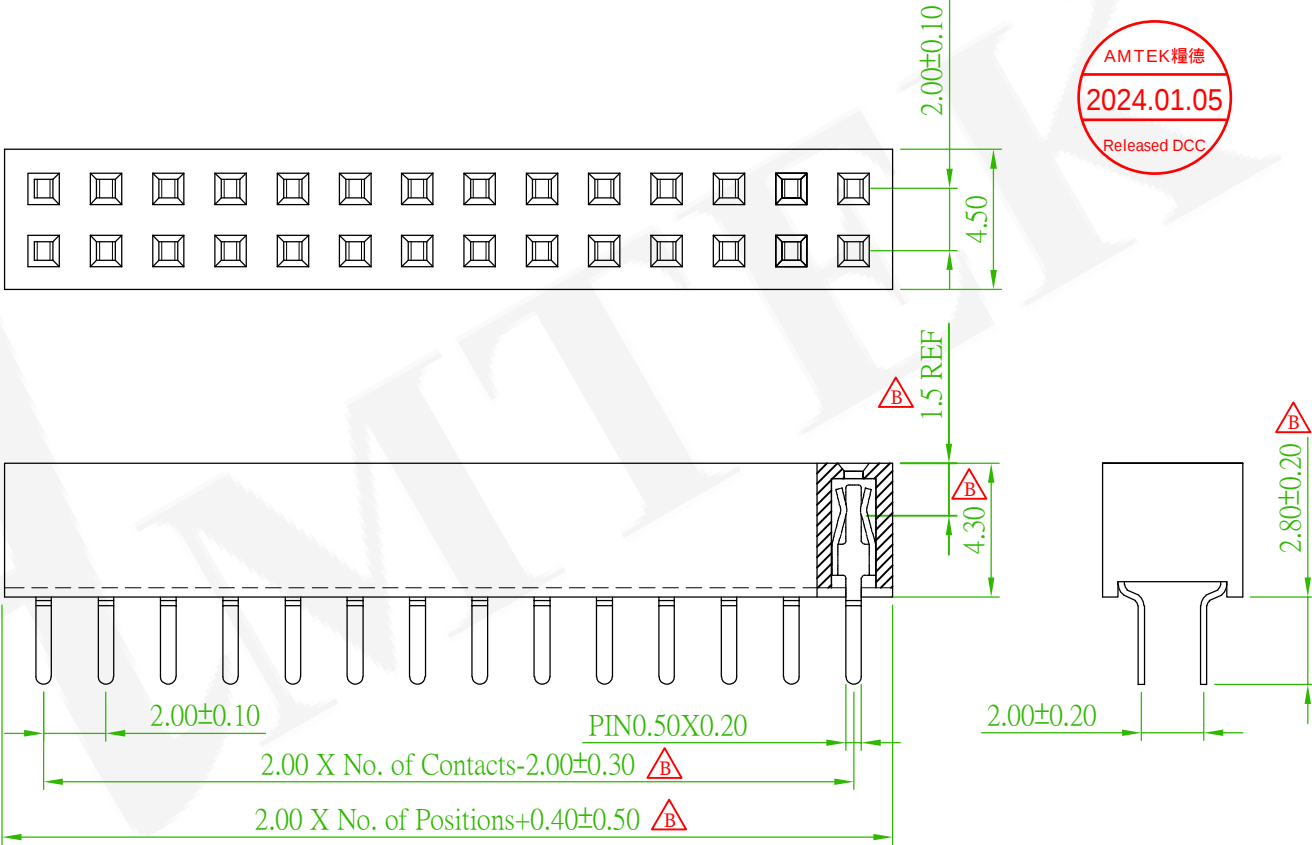

Old Part No. : PS2S43-2XX-U

△C	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
△B x7	ECN NO.210617: Revise the drawing	David	2021/07/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2SDA43-2XXXXNXXXU-00				繪圖 DRAWN	Jeff 2015/08/26
圖號 DRAWING NO.	GN147-DW504	版本 REV.	C	核對 CHECKED	John 2015/08/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	