
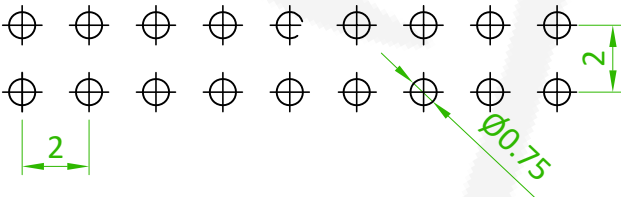
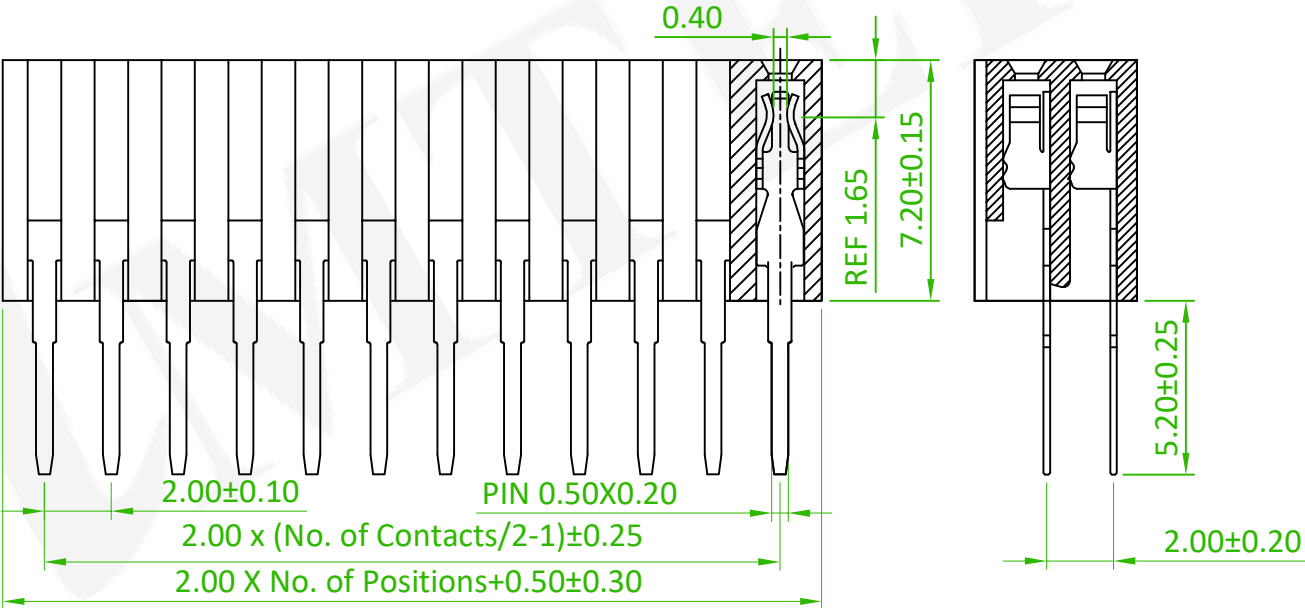


MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 2 S D A 7 2 - 2 X X X X X X X U - 0 0

2: Dual Row	No. of Pin Per Row (02~40)	◎G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" T0: Tin Plated TE: Tin 200u"	S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	N: W/O Peg	N: W/O Bump	◎T: Tube, W/O Cap C: Tube, With Cap H: Tape & Reel, W/O Cap R: Tape & Reel, With Cap N: Non Type	RoHS
-------------	-------------------------------	--	---	------------	-------------	---	------

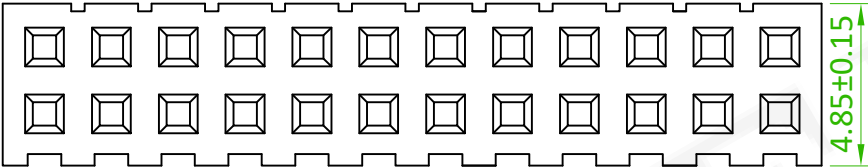

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2SDA72-2XXXXXXXXXU-00				繪圖 DRAWN	Nick 2019/09/24
	圖號 DRAWING NO.	GN003-NI374	版本 REV.	B	核對 CHECKED	Josh 2019/09/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/09/24	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
	ECN NO. OR DESCRIPTION	REVISED	DATE