

MATERIAL △

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION



5 P S 2 S D B 6 3 - 4 X X X X X X X △ X U - 0 0

4:Quad Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg N:W/O Bump	◎T:Tube, W/O Cap N:Non Type	RoHS
------------	------------------------------	--	---	-------------------------	--------------------------------	------



AMTEK 糧德

2025.01.04

Released DCC

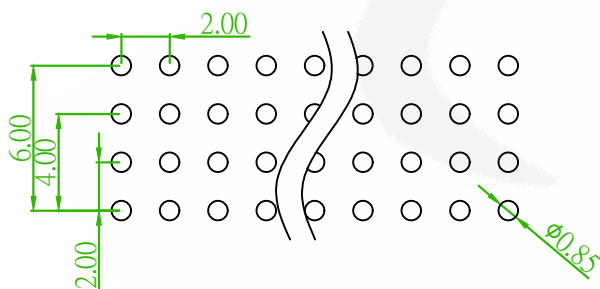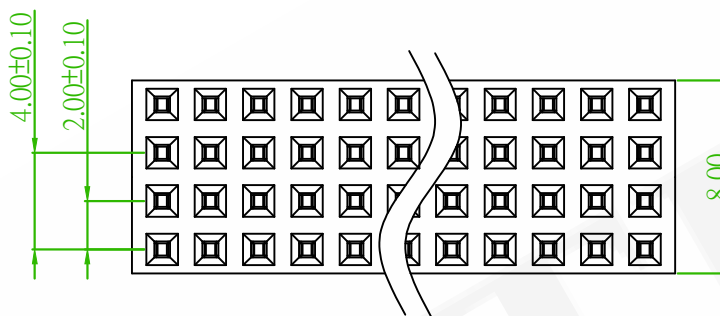

Recommended PCB Layout
(PCB TOLERANCE ±0.05) △

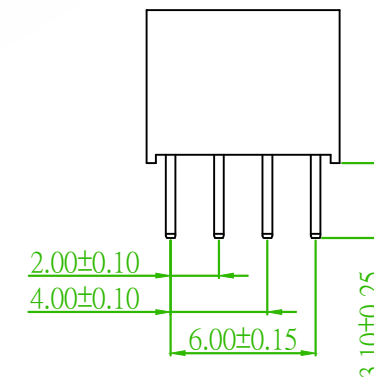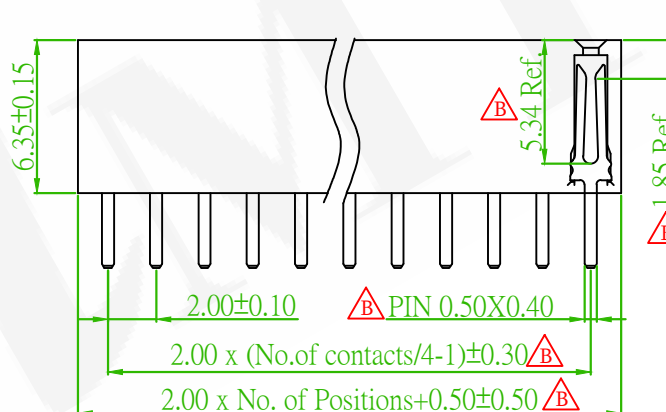

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
△ 6	ECN NO.:210661 Revise the drawing	Alice	2021/07/23


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2SDB63-4XXXXXXXXU-00				繪圖 DRAWN	Nick 2019/10/14
圖號 DRAWING NO.	GN147-NI432	版本 REV.	C	核對 CHECKED	Josh 2019/10/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/10/14	
公差 TOLERANCE	.X ± 0.38 .X° ± 3 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		