

MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5

P

S

2

S

H

A

2

0

-

1

X

X

X

X

X

X

X

U

-

0

0

1:Single Row

No. of Pin
Per Row(02~40)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump




T:Tube, W/O Cap

H:Tape & Reel,W/O Cap

N:Non Type

U: RoHS+Hi Temp

AMTEK 糧德
2024.01.05
Released DCC

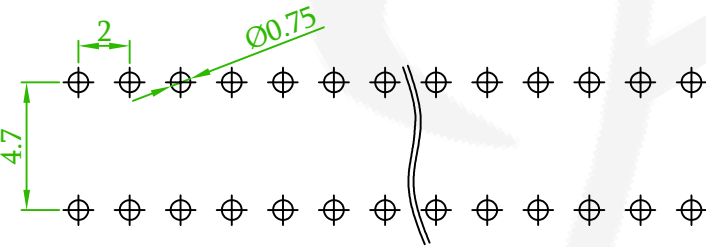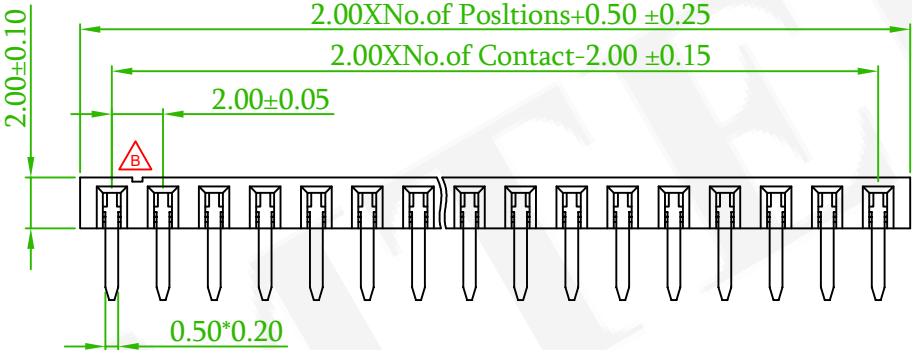

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Old Part No. : PS2RS-1XX-U

	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
	ECN NO.:230301 Revise the drawing	Alice	2023/03/16
	Add the Contact Point	Alice	2020/11/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm S/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	 5PS2SHA20-1XXXXXXXXXU-00	繪圖 DRAWN	Kent 2006/09/21			
圖號 DRAWING NO.	GN003-RL174	版本 REV.	F	核對 CHECKED	Paul 2006/09/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/09/21	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	