



ORDER INFORMATION

MATERIAL △ △

INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: PHOSPHOR BRONZE

5 P S 2 S H A 4 9 - 2 X X X X X X X X X U - 0 0 △ E

2:DUAL ROW	NO. OF PIN PER ROW(02~40)	◎G0:GOLD FLASH GA:5u" GB:10u" GC:20u" GD:30u"	S0:SELECTIVE SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O PEG	◎T:TUBE, W/O CAP H:TAPE & REEL,W/O CAP	U:RoHS+ HI-TEMP.
		T0:TIN PLATED TE:TIN 200u"		N:W/O BUMP	△ D N:NON TYPE	

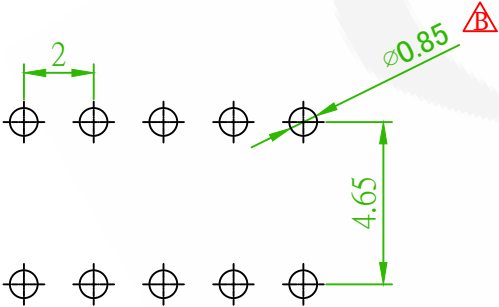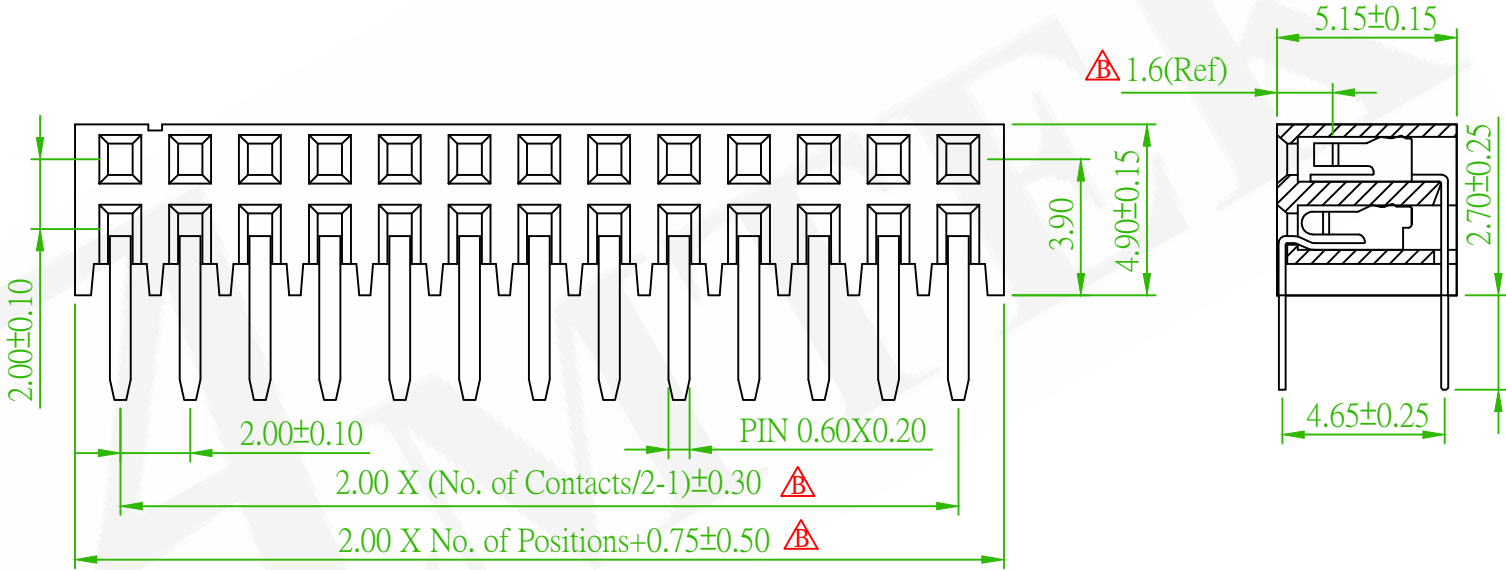

OLD PART NO. : PS2RS-2XX-U

△ Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

△ E	ECN-202506041 Revise the drawing	Gaby	2025/07/08
△ x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/16
△ x1	ECN NO.:210916 Revise the drawing	Alice	2021/10/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.00mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	△ 5PS2SHA49-2XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/26
圖號 DRAWING NO.	CN003-DW419	版本 REV.	E	核對 CHECKED	John 2015/08/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2024/05/27	
公差 TOLERANCE	.X $\pm$ 0.38 .XX $\pm$ 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		