

MATERIAL ⚠

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze or Brass

ORDER INFORMATION

5

P

S

2

S

H

A

4

9

-

2

X

X

X

X

X

X

X

U

-

0

X

2: Dual Row

No. of Pin Per Row(02~40)

◎G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0: Tin Plated

TE: Tin 200u"

S0: Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump


◎T:Tube, W/O Cap

H:Tape & Reel, W/O Cap


N:Non Type

U:RoHS+Hi-Temp.

00:Contact Pin:Brass
01:Contact Pin:Phosphor Bronze

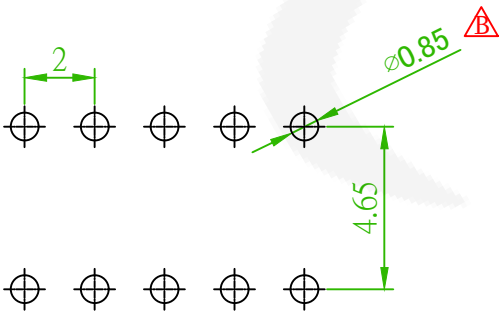

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

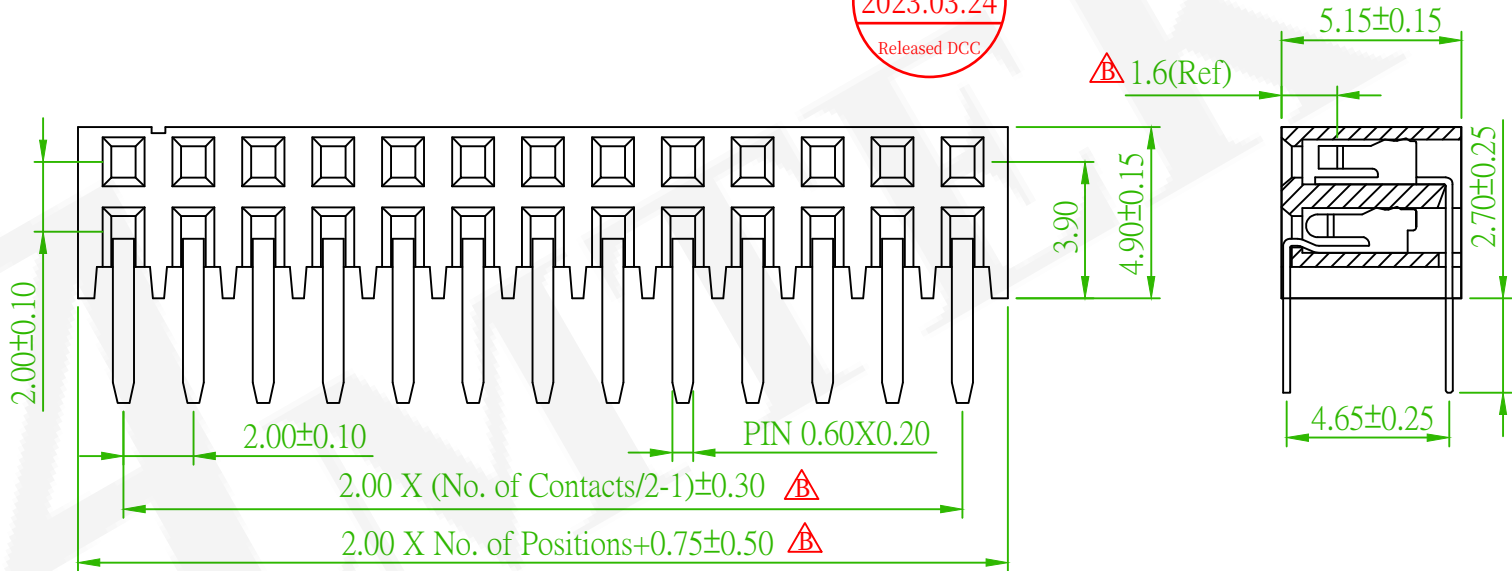

Old Part No. : PS2RS-2XX-U

⚠x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/16
⚠x1	ECN NO.:210916 Revise the drawing	Alice	2021/10/22
⚠x6	ECN 210132.: Revise the drawing	David	2021/02/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	⚠ 5PS2SHA49-2XXXXXXXXXU-0X	繪圖 DRAWN	Jeff		2015/08/26		
圖號 DRAWING NO.	GN003-DW419	版本 REV.	D	核對 CHECKED	John		
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John		
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION			
	⚠ .X°±3						