

ORDER INFORMATION


MATERIAL

Insulator: Nylon 9T,UL 94V-0, Black
Contact Pin: Phosphor Bronze


5 P S 3 B M A 2 0 - 1 X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	N:W/O Peg E:Outer Peg	N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel,W/O Cap R:Tape & Reel,With Cap	RoHS
					A:A Type B:B Type	

AMTEK 耀德
2024.01.05
Released DCC

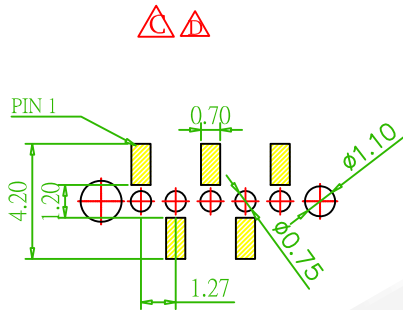


A TYPE




B TYPE



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

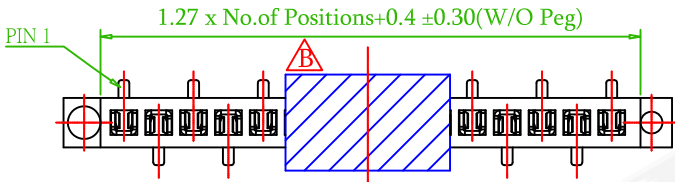

A TYPE

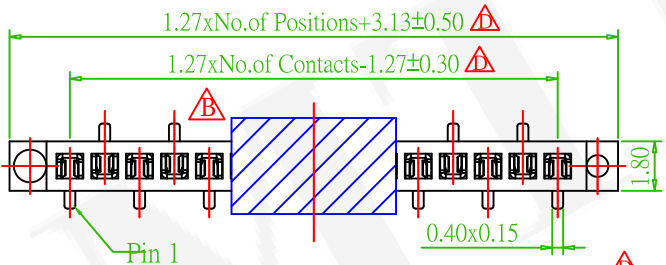

B TYPE

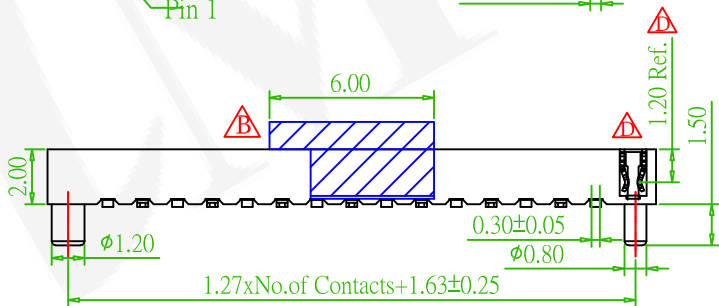

Old Part No. : PS3BM20-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 1.27mm S/R V/T SMT TYPE				頁數 Page	1/1
	品號 PART NO.	5PS3BMA20-1XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/31
	圖號 DRAWING NO.	GN003-RL708	版本 REV.	E	核對 CHECKED	Josh 2019/02/12	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/12	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△	ECN NO.:231005 Revise the drawing	Alice	2023/10/23
△x7	ECN NO.:210410,Revise the drawing	Alice	2021/04/29
△x1	Add the recommended mating part.	Gary	2019/02/12
REV.	DESCRIPTION	REVISED	DATE