

MATERIAL ⚠

Insulator: Nylon9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5

P

S

3

B

M

A

2

0

-

2

X

X

X

X

X

X

U

-

0

0

2: Dual Row

No. of Pin
Per Row(02~40)

◎G0:Gold Flash
GB:10u"
GF:15u"
GD:30u"

N:W/O Peg
P:With Peg
N:W/O Bump

◎T:Tube, W/O Cap
C:Tube, With Cap
H:Tape & Reel,W/O Cap
R:Tape & Reel,With Cap
M:Tape & Reel,With Mylar





U:RoHS+Hi Temp

N:NON Type


AMTEK 糧德

2024.01.05



Released DCC

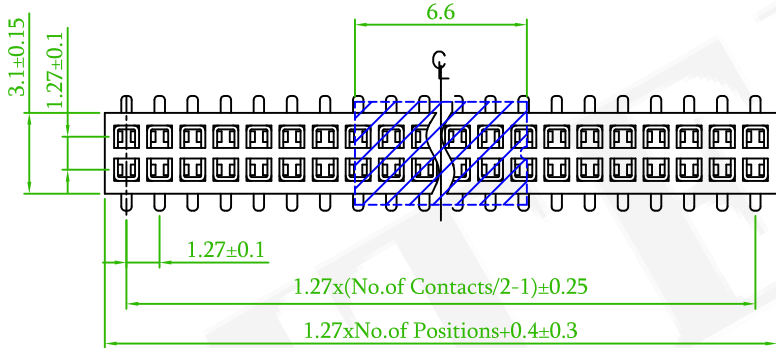

W/O Peg

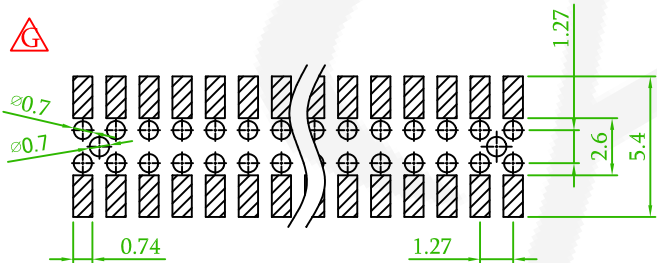

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

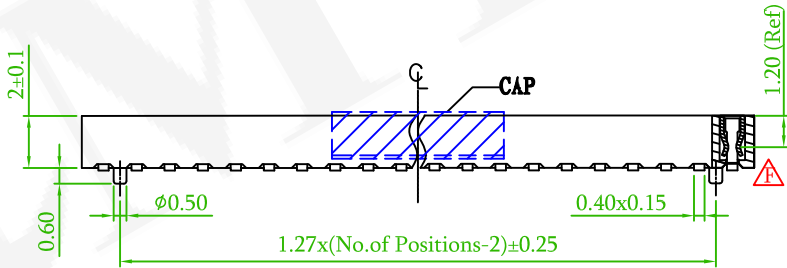

With Peg

Old Part No. : PS3BM20-2XX-U

⚠	ECN 231005.: Revise the drawing	Alice	2023/10/23
⚠x2	Add the Mylar	David	2021/02/25
⚠x2	ECN 200621.: Revise the drawing	David	2020/07/15
⚠x1	Add the Contact Point	David	2020/04/17
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		FEMALE HEADER 1.27mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS3BMA20-2XXXXXXXU-00	繪圖 DRAWN	Mia 2016/05/11				
圖號 DRAWING NO.	GN003-RL404	版本 REV.	I	核對 CHECKED	Josh 2019/01/11		
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/11		
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION		