
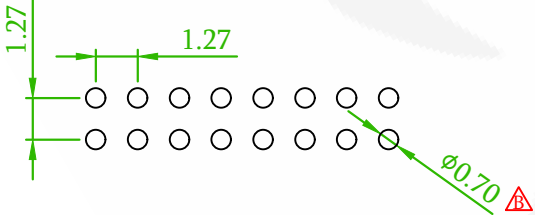


MATERIAL 
INSULATOR: NYLON9T, UL94V-0, BLACK
CONTACT PIN: PHOSPHOR BRONZE 

ORDER INFORMATION

5 P S 3 R D B 4 4 - 2 X X X X N N N X U - 0 0

2:DUAL ROW	NO. OF PIN PER ROW(02~50)	◎G0:GOLD FLASH GA:5U" GB:10U" GC:20U" GD:30U" T0:TIN PLATED TE:TIN 200U"	S0:SELECTIVE SA:5U" SB:10U" SC:20U" SD:30U"	N:W/O PEG N:W/O BUMP	◎T:TUBE, W/O CAP H:TAPE & REEL, W/O CAP	RoHS
					N:NON TYPE	

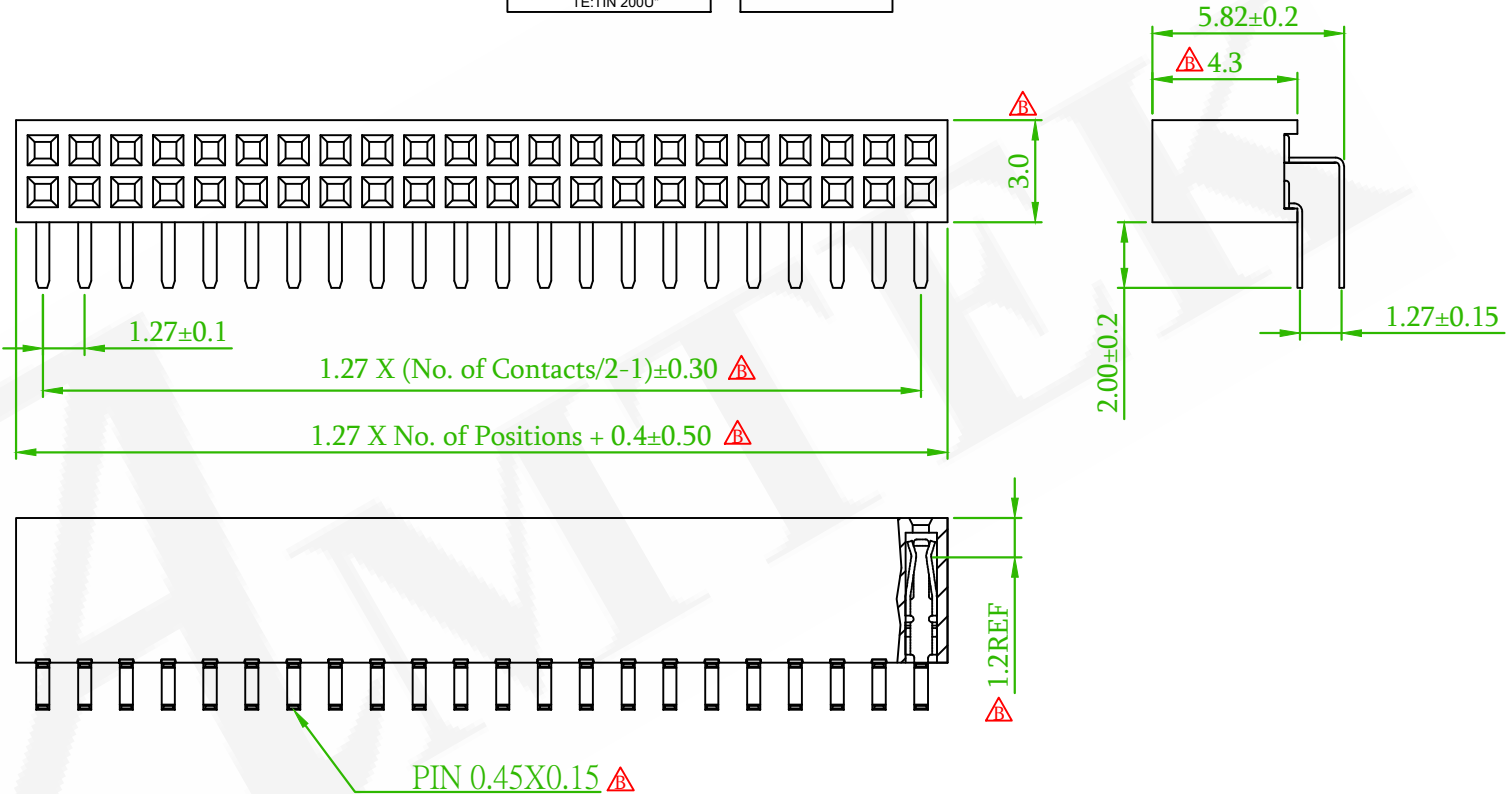

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05) 

OLD PART NO. :PS3R44-2XX-U

	ECN-202412033	Alice	2025/01/06
	ECN 231005.: Revise the drawing	Alice	2023/10/23
	ECN NO.210614: Revise the drawing	David	2021/07/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27x1.27mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5PS3RDB44-2XXXXXXXXXU-00				繪圖 DRAWN	Roy 2016/10/04
圖號 DRAWING NO.	GN147-DW505	版本 REV.	D	核對 CHECKED	Jonny 2016/10/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/04	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	