

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin: phosphor bronze

ORDER INFORMATION

5P S 3 S D A 3 4 - 1 X X X X N N N X U - 0 0

1:Single Row

No. of Pin Per Row(02~30)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump

T:Tube W/O Cap

C:Tube With Cap

H:T/R W/O Cap

R:T/R With Cap


F:Tube With Mylar

N:Non Type

RoHS



AMTEK 韋德
2022.04.12
Released DCC

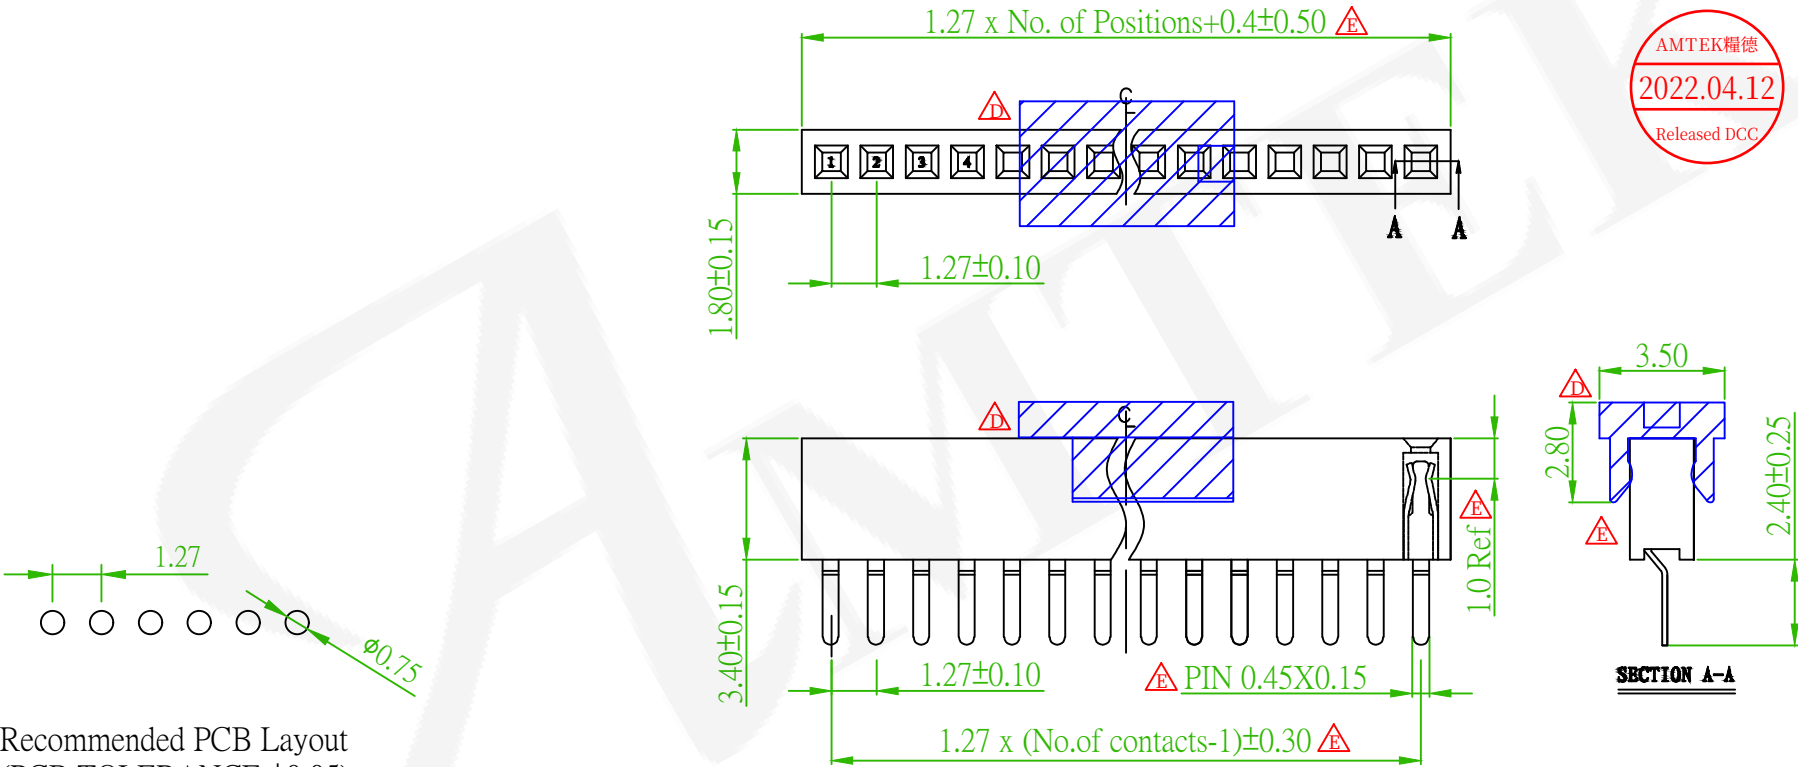

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS3S34-1XX-U

△x1	ECN NO.:220322 Revise the drawing	Alice	2022/04/07
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/21
△x6	ECN 201242.: Revise the drawing	David	2021/01/29
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

韋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PS3SDA34-1XXXXNNNXU-00				繪圖 DRAWN	Kent 2005/09/11
圖號 DRAWING NO.	GN003-RL141	版本 REV.	G	核對 CHECKED	Paul 2005/09/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2005/09/11	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		