

MATERIAL ⚠

Insulator:Nylon9T, UL94V-0, Black
Contact Pin:Phosphor Bronze

ORDER INFORMATION

5 P S 3 S D A 3 4 - 2 X X X X X X X U - 0 0

2:Dual Row

No. of Pin
Per Row(02~50)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

⚠ T:Tube W/O Cap

C:Tube With Cap


N:Non Type

RoHS

AMTEK 耀德

2024.01.05

Released DCC

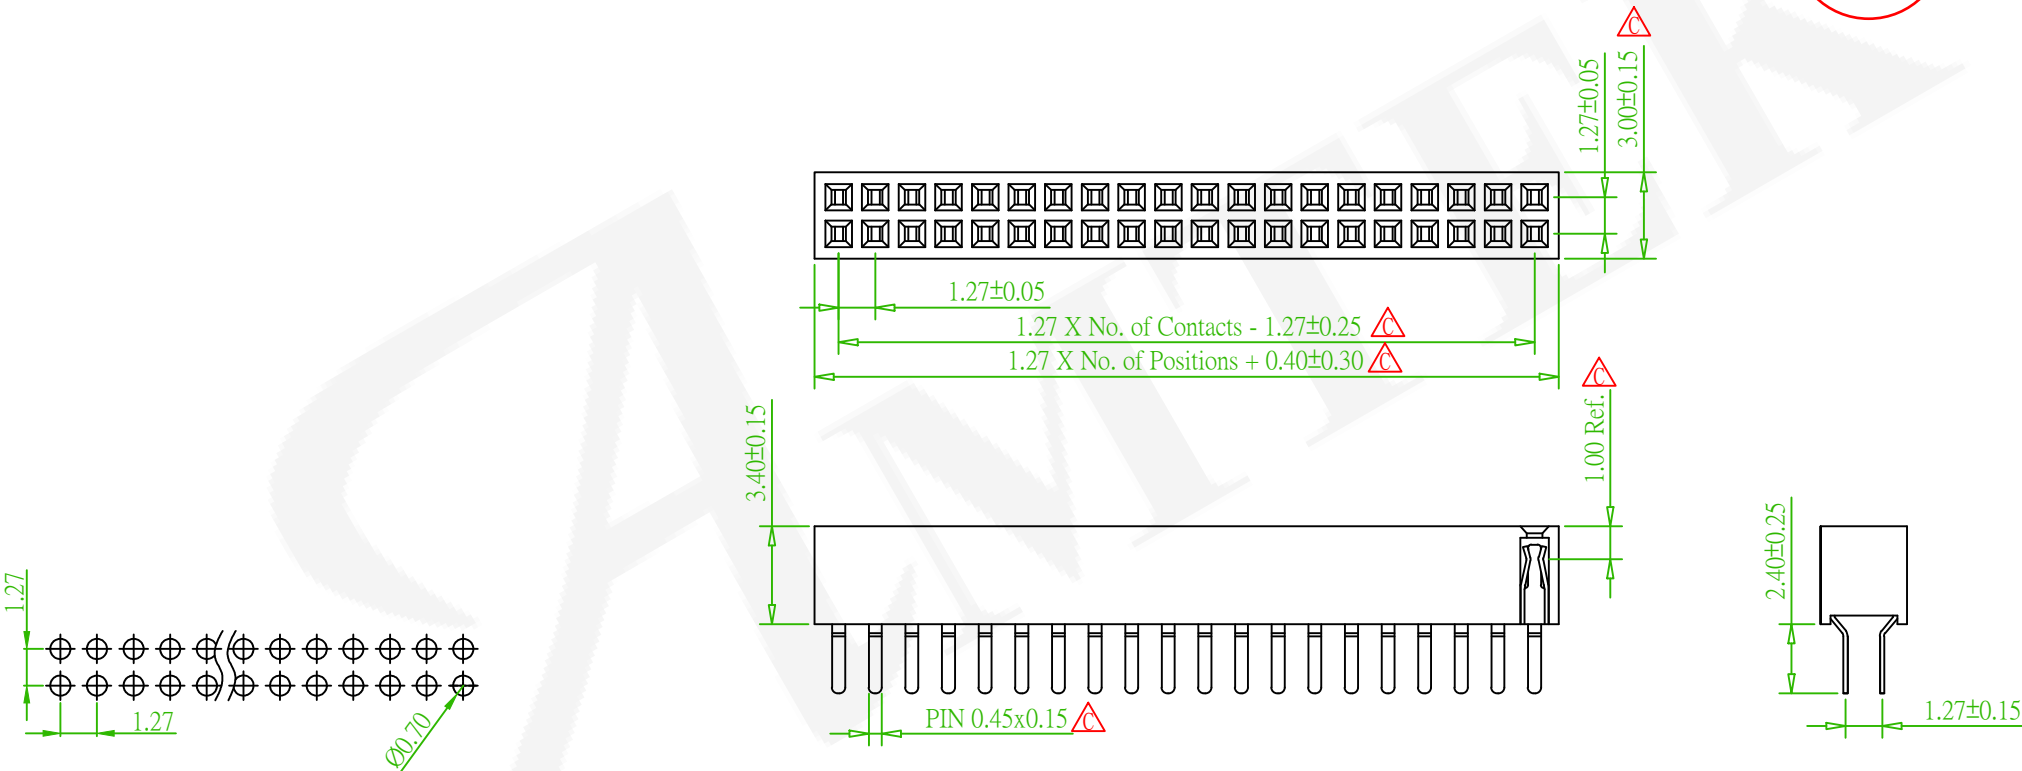

Recommended PCB Layout
(PCB TOLERANCE ±0.05) ⚠

Old Part No. : PS3S34-2XX-U

⚠	ECN NO.:231005 Revise the drawing	Alice	2023/10/23
⚠ x6	ECN NO.:210112 Revise the Drawing	Benson	2021/02/04
⚠ x1	Add the Package	Mia	2018/10/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27x1.27mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PS3SDA34-2XXXXXXXXXU-00				繪圖 DRAWN	Roy 2017/04/06
圖號 DRAWING NO.	GN003-RL645	版本 REV.	D	核對 CHECKED	Josh 2018/10/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/18	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		