

MATERIAL 
Insulator:Nylon9T, UL94V-0, Black
Contact Pin:Phosphor Bronze

ORDER INFORMATION

5 P S 3 S H A 3 4 - 2 X X X X N N N T U - 0 0

2: Dual Row

No. of Pin
Per Row(02~50)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg


T:Tube W/O Cap

RoHS

N:W/O Bump


N:Non Type

AMTEK 耀德
2024.01.05
Released DCC

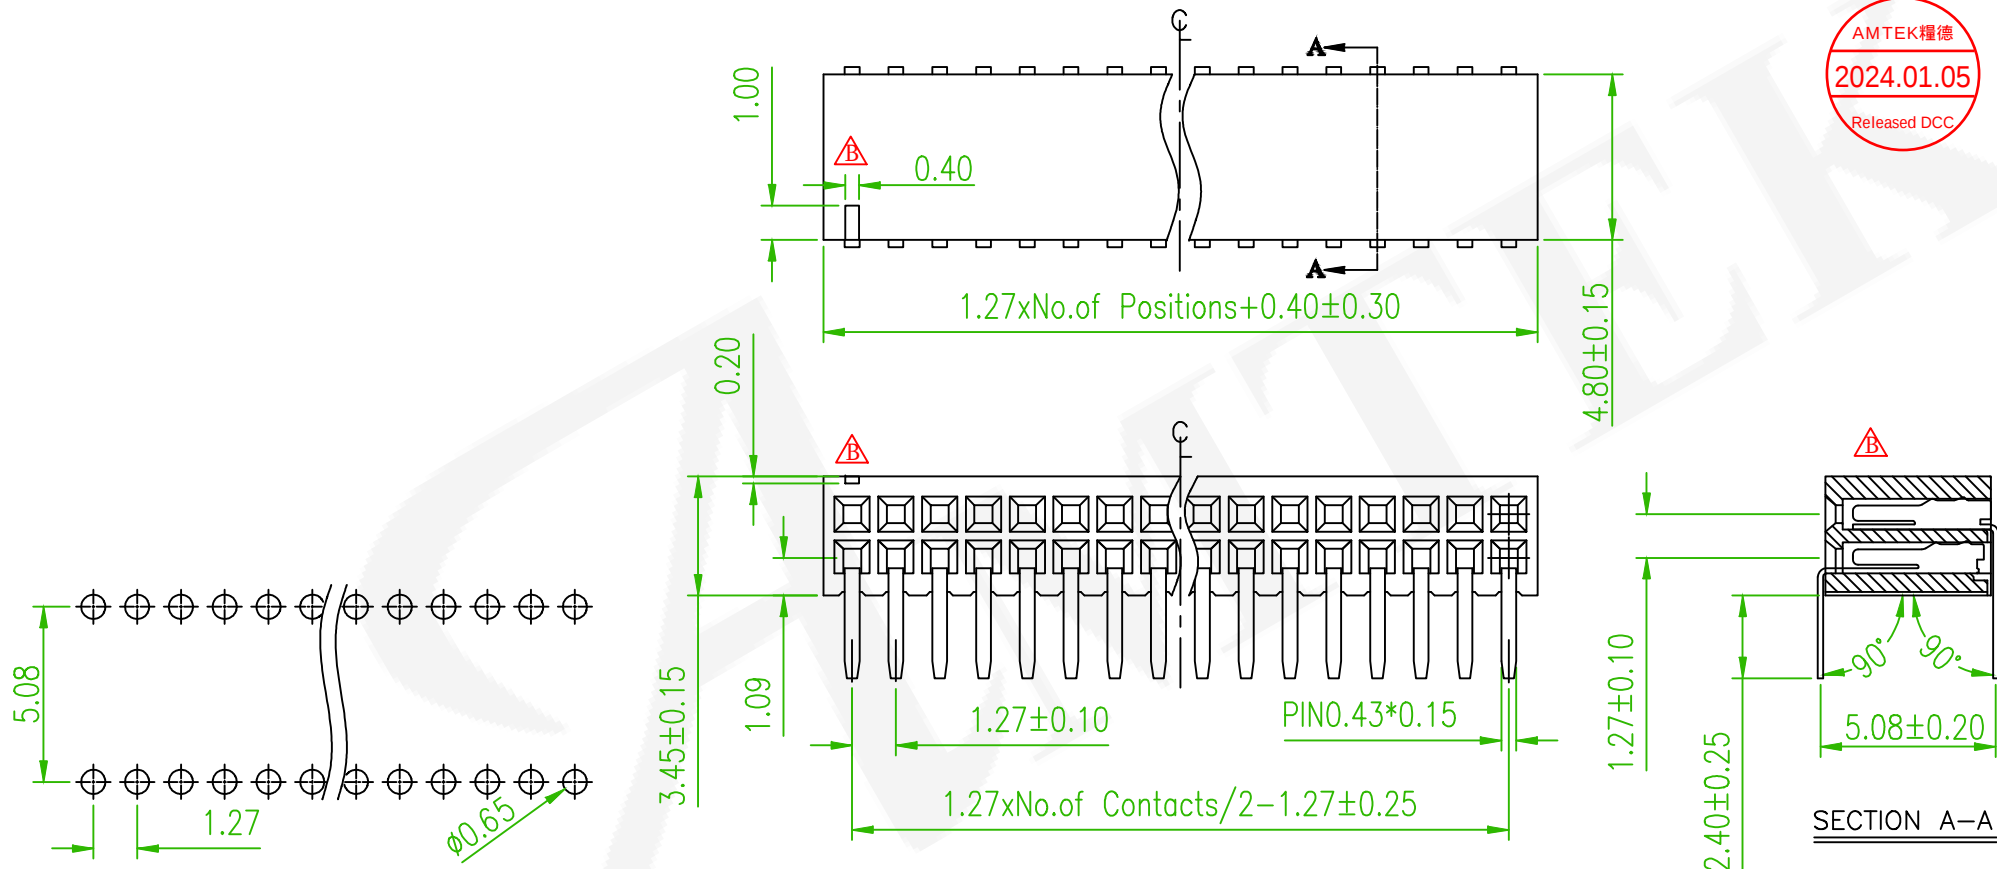

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No. : PS3RS-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 1.27x1.27mm				頁數 Page	1/1
	品號 PART NO.	5PS3SHA34-2XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2012/08/17
	圖號 DRAWING NO.	GN003-RL143	版本 REV.	C	核對 CHECKED	Yvonne 2012/08/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2012/08/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:231005 Revise the drawing	Alice	2023/10/23
	ECN No.:170603 , Revise the Insulator	B	2017/06/15 Roy