

ORDER INFORMATION




MATERIAL 

Insulator:Nylon 9T, UL94V-0, Black
Contact: Phosphor Bronze



5 P S 4 M S A 5 7 - 2 X X X X X X X U - 0 0

2: Dual Row	No. of Pin Per Row(03~50)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	T0:Tin Plated TE:Tin 200u"	N:W/O Peg P:Inner Peg	N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap	N:Non Type	RoHS
-------------	---------------------------	---	---	-------------------------------	--------------------------	------------	---	------------	------

AMTEK 耀德
2024.01.05
Released DCC

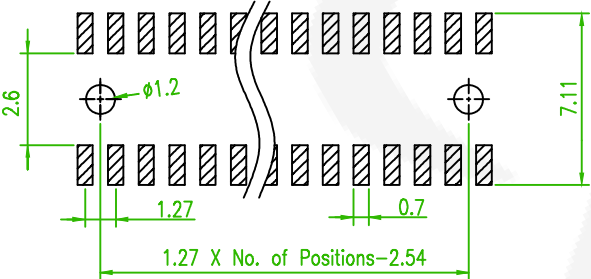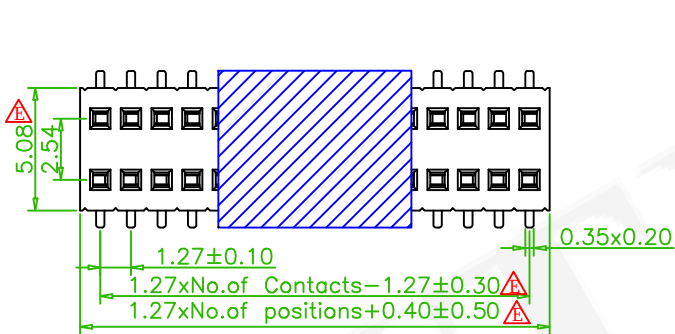

Recommended PCB Layout
(PCB TOLERANCE ±0.05) 

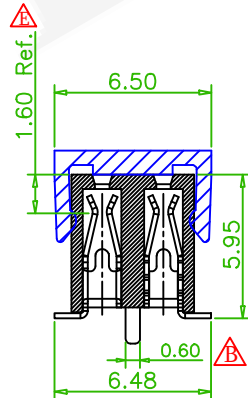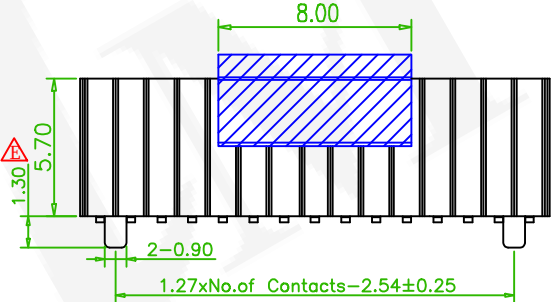

Old Part No. : PS4M58-2XX-U

	ECN NO.:231005 Revise the drawing	Alice	2023/10/23
 x8	ECR NO.210723: Revise the Drawing.	David	2021/07/30
 x1	ECR NO.190409: Add the Drawing.	Daniel	2019/05/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS4MSA57-2XXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/31
圖號 DRAWING NO.	GN003-RR870	版本 REV.	F	核對 CHECKED	Josh 2019/02/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/14	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	