

MATERIAL


Insulator:Nylon 9T, UL94V-0, Black
Contact: Phosphor Bronze

ORDER INFORMATION


5 P S 4 M S B 5 7 - 1 X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(03~40) 	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel,W/O Cap R:Tape & Reel,With Cap	RoHS
		T0:Tin Plated TE:Tin 200u"			A:A Type B:B Type	

AMTEK 耀德
2024.01.05
Released DCC

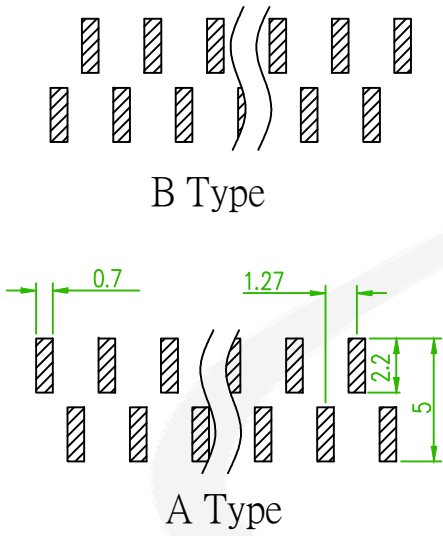

Recommended PCB Layout
(PCB TOLERANCE ± 0.05) 

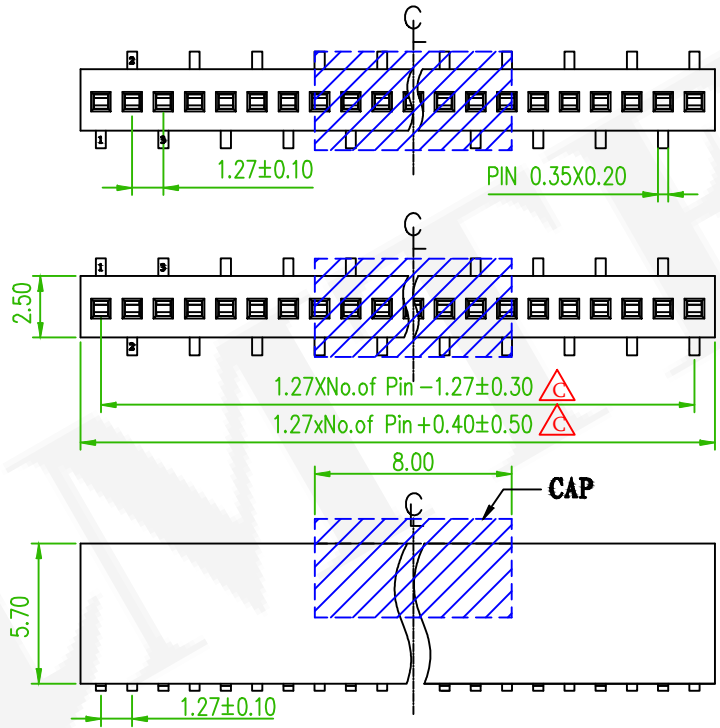

B Type

A Type

Old Part No. : PS4M58-1XX-U

	ECN NO.:231005 Revise the drawing	Alice	2023/10/23
	ECN NO.210626: Revise the drawing	David	2021/07/01
	QEC NO.:190918 Revise the No. of Pin	David	2019/10/15
REV.	DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS4MSB57-1XXXXXXXXXU-00				繪圖 DRAWN	Nick 2019/08/23
圖號 DRAWING NO.	GN016-NI315	版本 REV.	D	核對 CHECKED	Josh 2019/08/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/08/23	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	