

MATERIAL

Insulator: Nylon9T, UL94V-0, Black

Terminal: Phosphor Bronze

ORDER INFORMATION

5 P S 5 M R A 3 7 - 1 X X X X X X X U - 0 0

1:Single Row

No. of Contact
Per Row (02~40)

G0:Gold Flash	S0:Selective Au
GA:Au 5u"	SA:Selective Au 5u"
GB:Au 10u"	SB:Selective Au 10u"
GC:Au 20u"	SC:Selective Au 20u"
GD:Au 30u"	SD:Selective Au 30u"
T0:Tin Plated	TE:Tin 200u"

N:W/O Peg
P:With Peg

N:W/O Bump



T:Tube, W/O Cap

X:Box



H:T/R, W/O Cap

N: Non Type


RoHS

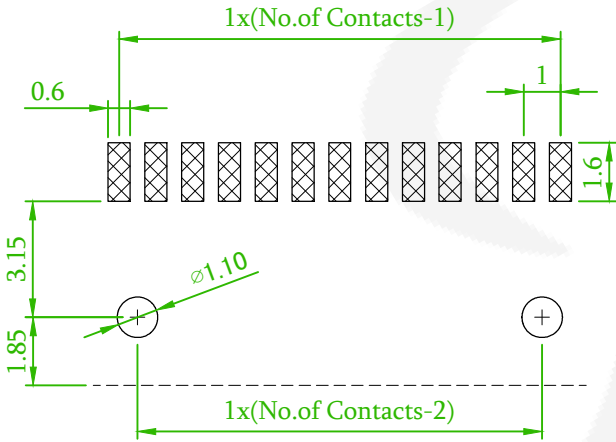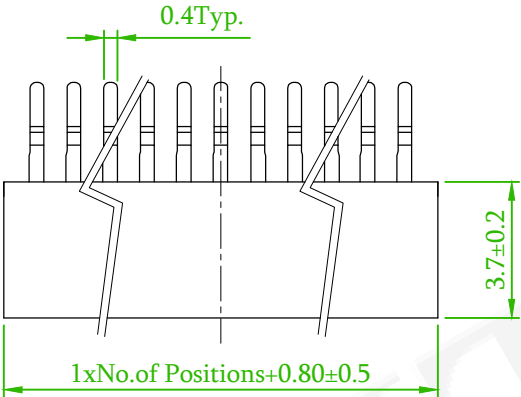

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

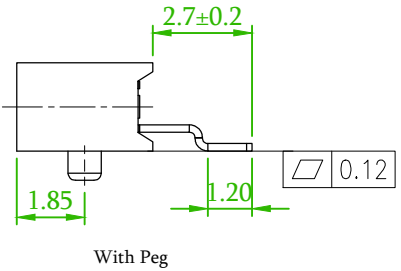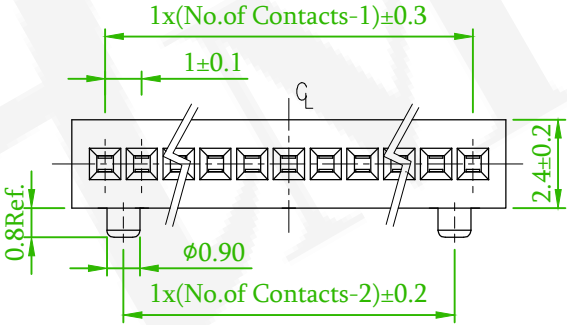

With Peg



W/O Peg

△	ECN NO.:231005 Revise the drawing	Gaby	2023/10/23
△x2	Add the Package:Box&Tape-Reel	Mia	2018/02/21
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.0mm S/R R/A SMT TYPE				頁數 Page	1/1
品號 PART NO.	△ 5PS5MRA37-1XXXXXXXXXU-00				繪圖 DRAWN	Mia 2017/11/15
圖號 DRAWING NO.	GN003-MC751	版本 REV.	C	核對 CHECKED	Jason 2017/11/15	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/11/15	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	