

MATERIAL

Insulator: Nylon9T, UL94V-0, Black
Terminal: Phosphor Bronze 

ORDER INFORMATION

5 P S 5 S D A 2 1 - 2 X X X X X X X U - 0 0

◎:Standard Recommend

2:Dual Row

No. of Contact
Per Row (02~40)

◎G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump

N:Non Type

X:Box

T:Tube W/O Cap


C:Tube With Cap

H:T/R W/O Cap


R:T/R With Cap

RoHS

Dim.D	Dim.E	NOTE
3.00mm	3.85mm	03 Pin
4.20mm	3.40mm	04~40Pin



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

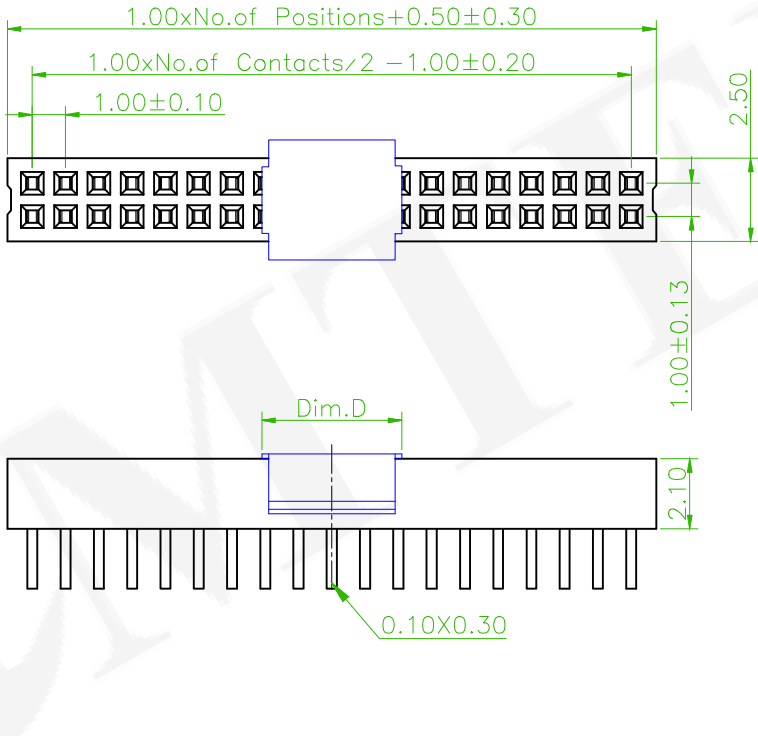

Old Part No.:PS5S21-2XX-U

REV.	ECN NO.:231005 Revise the drawing	Gaby	2023/10/23
	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.0mm				頁數 Page	1/1
品號 PART NO.	5PS5SDA21-2XXXXXXXU-00				繪圖 DRAWN	Roy 2016/12/22
圖號 DRAWING NO.	GW013-RL258	版本 REV.	B	核對 CHECKED	Jonny 2016/12/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/22	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	