



SPECIFICATIONS

CURRENT RATING: 1.5 AMP
VOLTAGE RATING: 125 VAC RMS.
INSULATION RESISTANCE: 1000MΩ MIN@500VDC
CONTACT RESISTANCE: 40mΩ MAX.
DIELECTRIC STRENGTH: 1000VAC RMS 60Hz,1MIN
DURRABILITY:750 CYCLES
OPERATION TEMPERATURE: -20℃ ~75℃
STORAGE TEMPERATURE:-40℃~85℃

MATERIALS
HOUSING:PBT,UL94V-0
CONTACTS:PHOSPHOR BRONZE

ORDER INFORMATION

5 R J 1 D R 0 0 N 0 X - 4 4 X X 0 0 X - 504 - Y 1

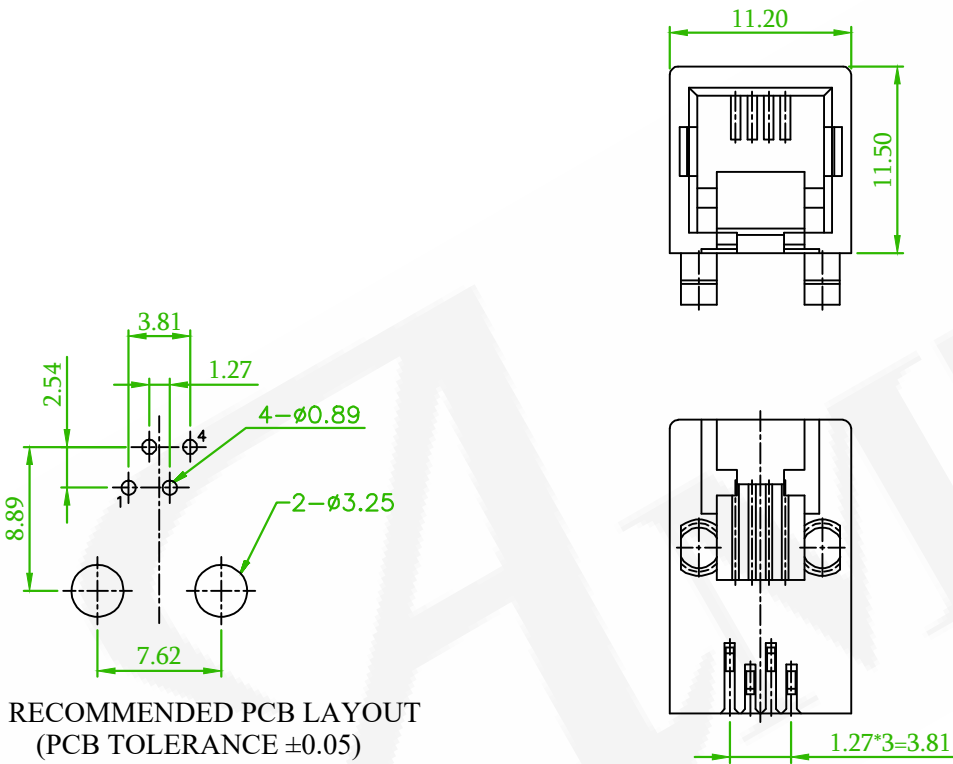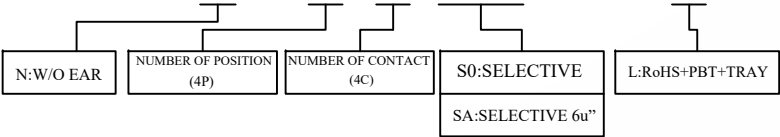

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

△	ECN 202502025	Willy	2025/03/11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	△ MODULAR JACK DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5RJ1DR00N0X-44XX00X-504-Y1				繪圖 DRAWN	Gaby 2023/07/04
	圖號 DRAWING NO.	GN225-GY110	版本 REV.	B	核對 CHECKED	JOSH 2023/07/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2023/07/04	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	