

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE Ø=0.46mm,G/FU" GOLD PLATING

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5mm/MINUTE.
INSERTION FORCE: 2.2K.G.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃~+85℃.





ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MΩ MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30mΩ MAX.
INITIAL 50mΩ MAX. AFTER
DURABILITY TEST.

ORDER INFORMATION

5 R J 1 D R 0 0 N 0 X - 6 4 X X 0 0 X - 552 - R 1

0: W/O SHIELDED
E: WITH EAR
NUMBER OF POSITION (6:6P)
NUMBER OF CONTACT (4:4C)
G0:GOLD FLASH
L:ROHS+PBT+TRAY

AMTEK 耀德
2024.06.18
Released DCC

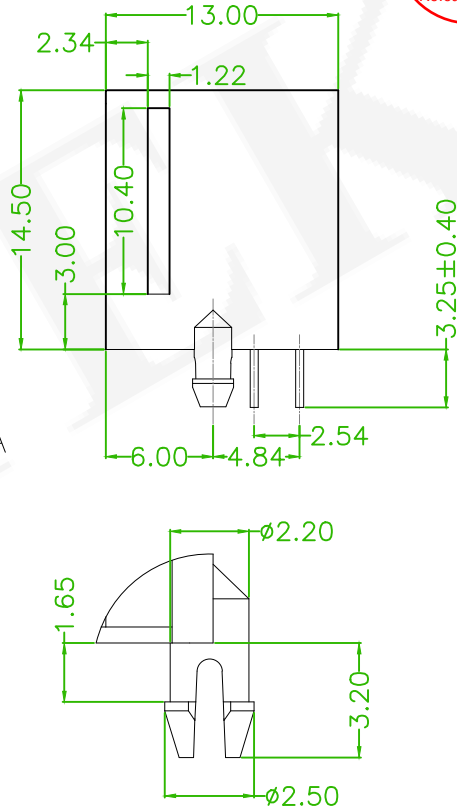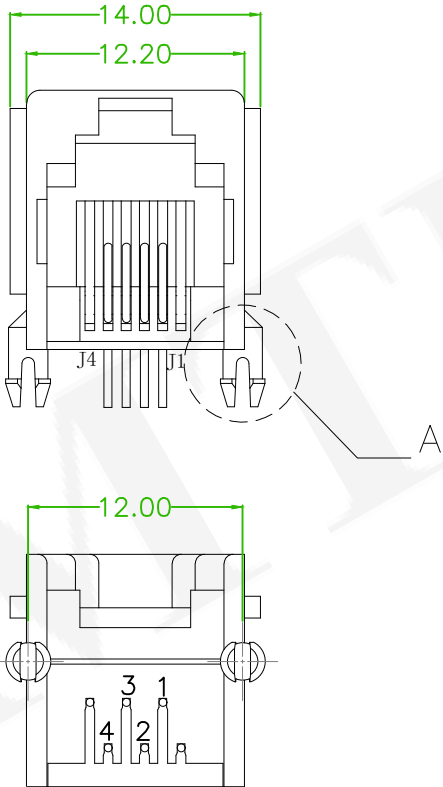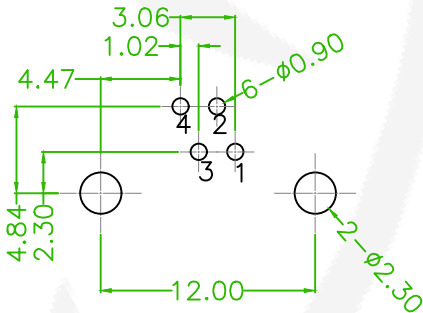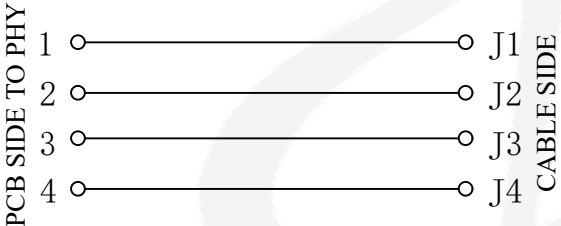


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MODULAR JACK DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5RJ1DR00N0X-64XX00X-552-R1			繪圖 DRAWN	Randy 2024/06/17	
圖號 DRAWING NO.	GN169-RD553	版本 REV.	A	核對 CHECKED	Josh 2024/06/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/06/17	
公差 TOLERANCE	.X±0.30 .XX±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	BLM No.: 20240614006	Randy	2024/06/17