

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP

DIELECTRIC STRENGTH: 1000 VAC Rms 50HZ or 60HZ,1MIN.

INSULATION RESISTANCE: 500 MΩ MIN. INITIAL

AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 mΩ MAX.

INITIAL 50 mΩ MAX. AFTER

DURABILITY TEST.

DURABILITY: 750 CYCLES MIN,12.5mm/MINUTE.

INSERTION FORCE: 2.2KG.F Max.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40℃~+85℃.

MATERIAL:

HOUSING: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE Ø=0.46mm

ORDER INFORMATION

5 R J 1 D R 0 0 N 0 X - 6 6 X X 0 0 X - 5 3 2 - R 1

N:W/O Ear

GA: Au 6u"

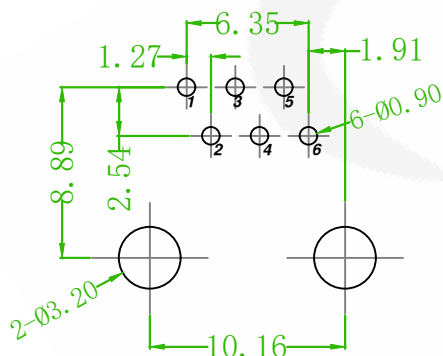
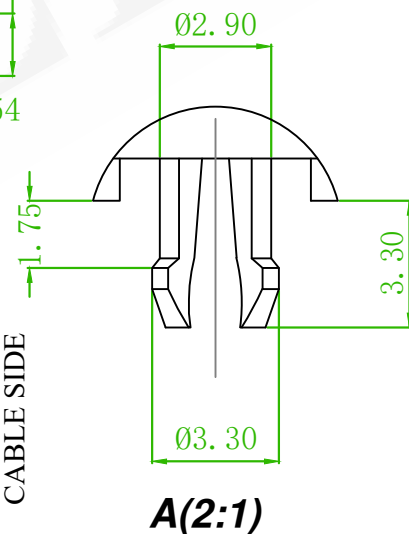
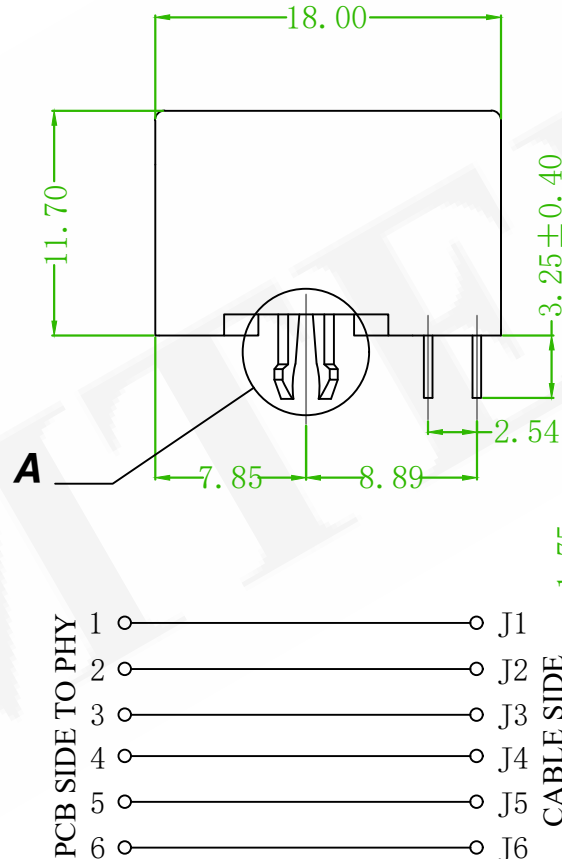
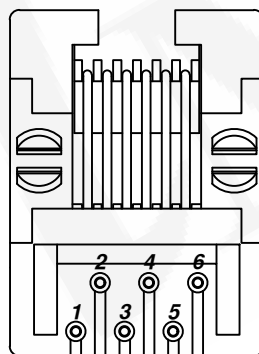
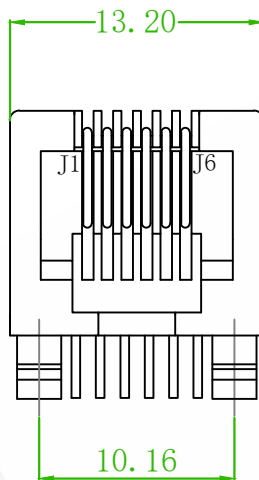
G0: GOLD FLASH

L: RoHS+PBT+Tray

AMTEK 懋德

2024.12.20

Released DCC

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

REV.	BPM 20241218008	Gaby	2024/12/18
	EasyFlow No.:202401170004	Alice	2024/01/18
	ECN NO. OR DESCRIPTION	REVISED	DATE

懋德精密有限公司
Amtek Technology Co., Ltd.TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		MODULAR JACK DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.		5RJ1DR00N0X-66XX00X-532-R1				繪圖 DRAWN	Alice 2024/01/18
圖號 DRAWING NO.			版本 REV.	B	核對 CHECKED	JOSH 2024/01/18	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	JOSH 2024/01/18	
公差 TOLERANCE		.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		