



SPECIFICATIONS

Current Rating: 1.5 AMP
Voltage Rating: 125 Vac Rms.
Insulation Resistance: 1000MΩ Min@500 Vdc
Contact Resistance: 40mΩ Max.
Dielectric Strength: 1000Vac Rms 60Hz,1Min
Durrability:750 Cycles
Operation Temperature: -20°C ~ 75°C
Storage Temperature:-40°C~85°C


MATERIALS

Housing: PBT,UL94V-0
Contacts: Phosphor bronze




ORDER INFORMATION

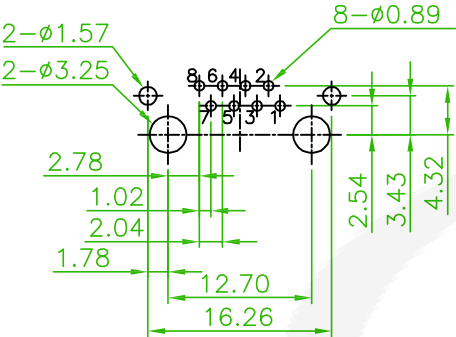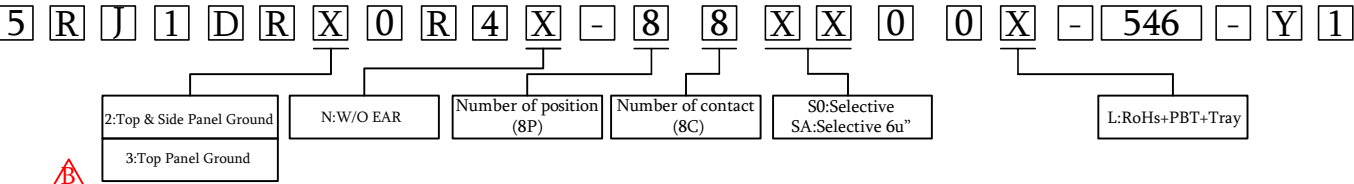

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Recommended Panel Cutout

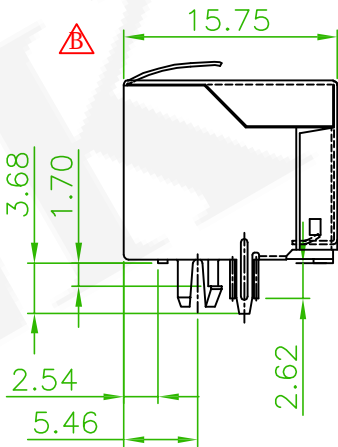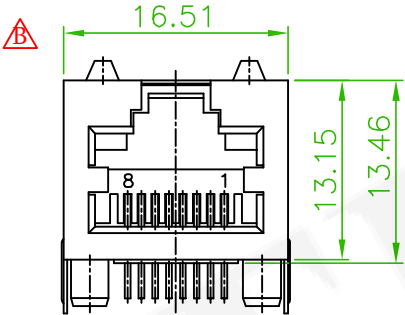

AMTEK 糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MODULAR JACK SHIELDED R/A TYPE				頁數 Page	1/1
品號 PART NO.	5RJ1DRX0R4X-88XX00X-546-Y1				繪圖 DRAWN	Gaby 2023/07/03
圖號 DRAWING NO.	GN225-GY002	版本 REV.	B	核對 CHECKED	Josh 2023/07/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/07/03	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	EasyFlow202311090004 Add the 3:Top Panel Ground	Gaby	2023/11/09