

SPECIFICATIONS

Current Rating: 1.5 AMP
Voltage: 125 Volts AC.
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 40mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Durability: 750 Cycles
Operation Temperature: -20°C+75°C
Storage Temperature: -40°C+85°C


MATERIAL

Housing: PBT UL 94V-0, Black
Contacts: Phosphor bronze



ORDER INFORMATION

5 R J 1 D S 0 0 N 0 X - 4 4 X X 0 0 X - 609 - Y 1

N:W/O Ear E:With Ear	Number of position (4P)	Number of contact (4C)	S0:Selective SA:Selective 6u"	L:RoHS+ PBT+Tray
-------------------------	----------------------------	---------------------------	----------------------------------	---------------------

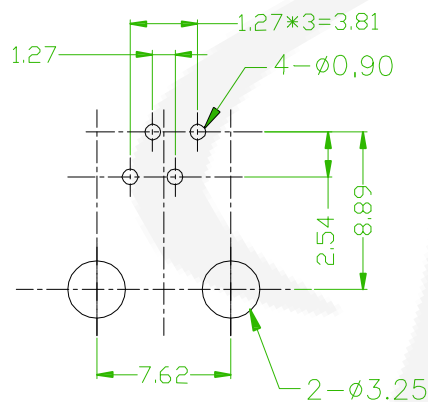

Recommended PCB Layout
(PVB TOLERANCE±0.05)

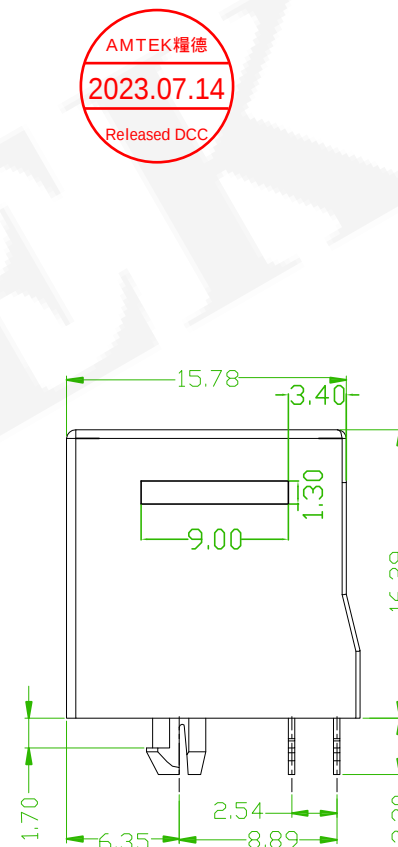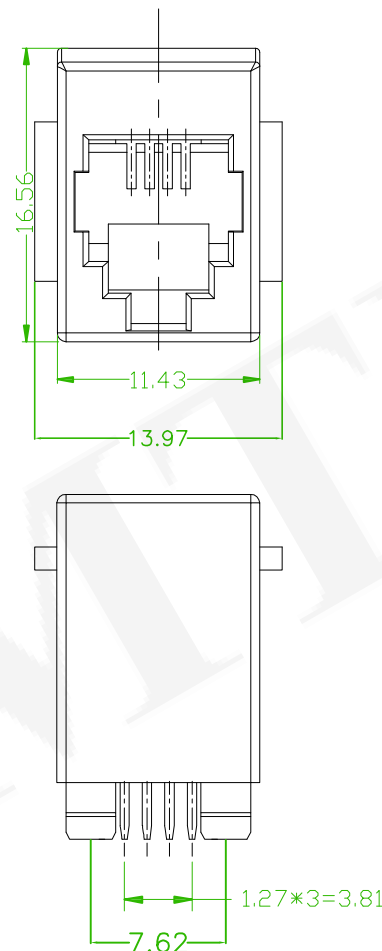

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MODULAR JACK TOP ENTRY				頁數 Page	1/1
	品號 PART NO.	5RJ1DS00N0X-44XX00X-609-Y1				繪圖 DRAWN	Randy 2023/07/06
	圖號 DRAWING NO.	GN225-RD005	版本 REV.	A	核對 CHECKED	Josh 2023/07/06	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/07/06	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	