

SPECIFICATIONS

Current Rating: 1.5 AMP
Voltage: 125 Volts AC.
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 40mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Durrability:750 Cycles
Operation Temperature: -20 °C+75 °C
Storage Temperature:-40°C+85°C

MATERIAL

Housing: PBT UL 94V-0,Black
Contacts: Phosphor bronze

ORDER INFORMATION

5R1DS00N0X-66XX00X-609-Y1


N:W/O Ear
E:With Ear

Number of position
(6P)




Number of contact
(6C)

S0:Selective
SA:Selective 6u"

L:RoHS+
PBT+Tray

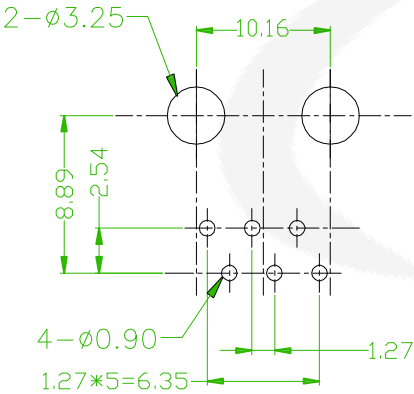

Recommended PCB Layout
(PVB TOLERANCE±0.05)

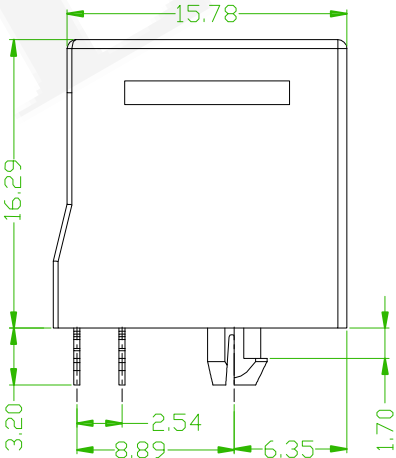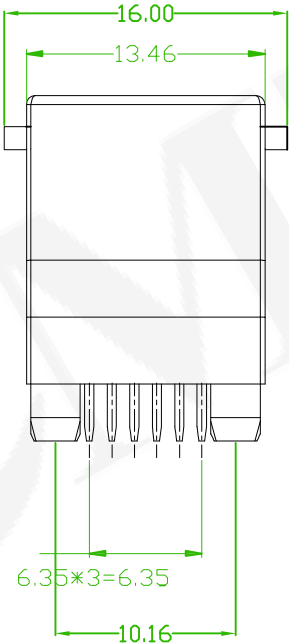

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MODULAR JACK TOP ENTRY				頁數 Page	1/1
品號 PART NO.	5RJ1DS00N0X-66XX00X-609-Y1				繪圖 DRAWN	Randy 2023/07/06
圖號 DRAWING NO.	GN225-RD007	版本 REV.	A	核對 CHECKED	Josh 2023/07/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/07/06	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE