

SPECIFICATIONS

Current Rating: 1.5 AMP

Voltage: 125 Volts AC.

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 40m Ω Max.

Dielectric Voltage: 1000V AC for one minute

Durrability:750 Cycles

Operation Temperature: -20 °C+75 °C

Storage Temperature:-40°C+85°C




MATERIAL

Housing: PBT UL 94V-0,Black



Contacts: Phosphor bronze

ORDER INFORMATION

5 R J 1 D S 0 0 N 0 X - 8 8 X X 0 0 X - 618 - Y 1

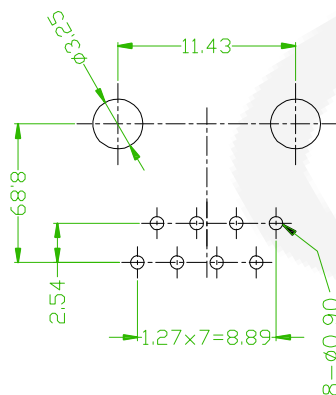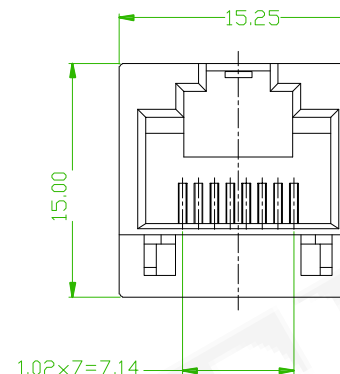

Recommended PCB Layout
(PVB TOLERANCE±0.05)

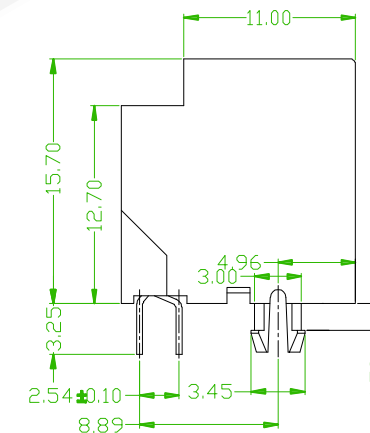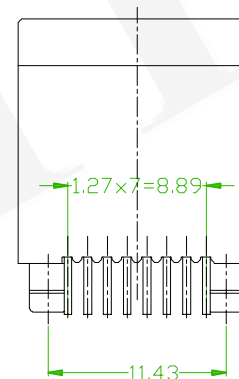

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MODULAR JACK TOP ENTRY				頁數 Page	1/1
	品號 PART NO.	5RJ1DS00N0X-88XX00X-618-Y1				繪圖 DRAWN	Randy 2023/07/05
	圖號 DRAWING NO.	GN225-RD003	版本 REV.	A	核對 CHECKED	Josh 2023/06/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/06/19	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE