

SPECIFICATIONS


Current Rating: 1.5 AMP
Voltage Rating: 125 Vac Rms.
Insulation Resistance: 1000MW Min@500Vdc
Contact Resistance: 40mW Max.
Dielectric Strength: 1000Vac Rms 60Hz,1Min
Durrability:750 Cycles
Operation Temperature: -20°C~75°C
Storage Temperature:-40°C~85°C

MATERIALS


housing:PBT,UL94V-0
contacts:phosphor bronze

ORDER INFORMATION




5 R J 1 D S 0 0 N 0 X - 8 8 X X 0 0 X - 61N - Y 1



AMTEK 耀德
2023.07.11
Released DCC

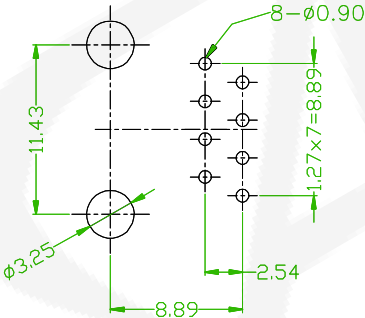

Recommended PCB Layout
(Thickness=1.60mm)
(PCB TOLERANCE ±0.05)

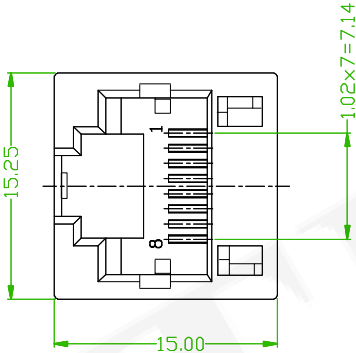



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MODULAR JACK				頁數 Page	1/1
品號 PART NO.	5RJ1DS00N0X-88XX00X-61N-Y1				繪圖 DRAWN	Gaby 2023/07/04
圖號 DRAWING NO.	GN225-GY011	版本 REV.	A	核對 CHECKED	Josh 2023/06/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/06/19	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE