

SPECIFICATIONS

CURRENT RATING: 1.5 AMP
VOLTAGE RATING: 125 VAC RMS.
INSULATION RESISTANCE: 1000MΩ MIN@500 VDC
CONTACT RESISTANCE: 40mΩ MAX.
DIELECTRIC STRENGTH: 1000VAC RMS 60HZ,1MIN
DURRABILITY:750 CYCLES
OPERATION TEMPERATURE: -20°C~75°C


MATERIALS

HOUSING: ENGINEERING THERMOPLASTIC,UL94V-0
CONTACTS: PHOSPHOR BRONZE



ORDER INFORMATION

5 R J 1 D S X 0 R 1 X - 8 8 X X 0 0 X - 602 - Y 1

1:NON PANEL GROUND	N:W/O EAR	NUMBER OF POSITION (8P)	NUMBER OF CONTACT (8C)	S0:SELECTIVE SA:SELECTIVE 6u"	L:ROHS+TRAY
-----------------------	-----------	----------------------------	---------------------------	----------------------------------	-------------

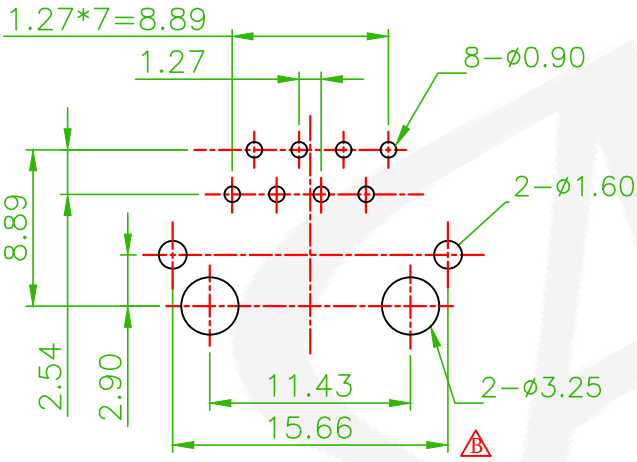

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

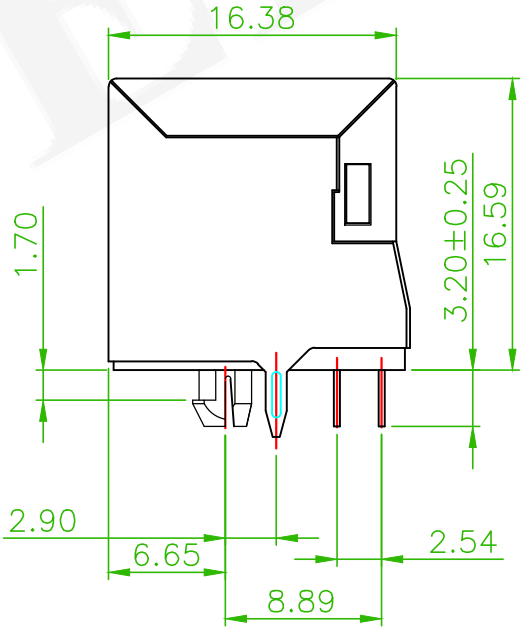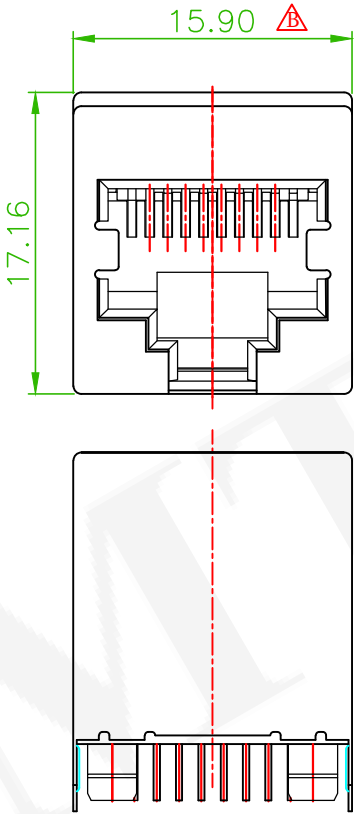

REV.	ECN NO.:240821 Revise the drawing	Gaby	2024/09/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MODULAR JACK TOP ENTRY				頁數 Page	1/1
品號 PART NO.	5RJ1DSX0R1X-88XX00X-602-Y1				繪圖 DRAWN	Gaby 2023/07/04
圖號 DRAWING NO.	GN225-GY013	版本 REV.	B	核對 CHECKED	Josh 2023/06/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/06/19	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	