






SPECIFICATION

CURRENT RATING: 1.5 AMP
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 50mΩ MAX.
DIELECTRIC VOLTAGE: 1000VAC FOR ONE MINUTE
OPERATION TEMPERATURE: -40°C TO +85°C


MATERIAL

INSULATOR: PC , UL94V-2
CONTACT PIN: COPPER ALLOY

ORDER INFORMATION

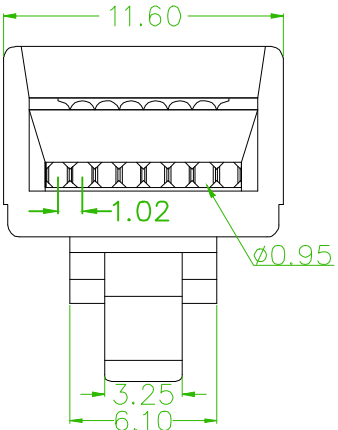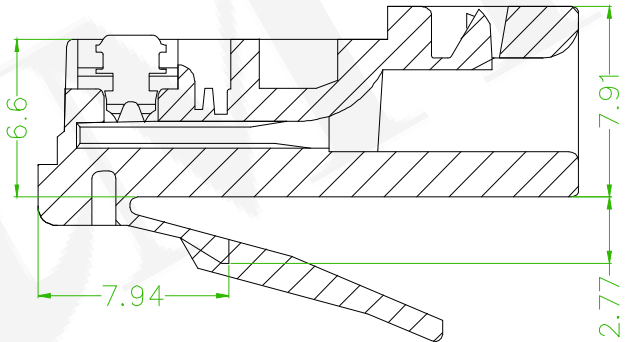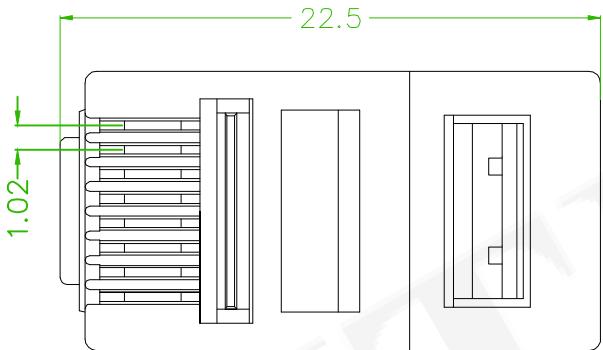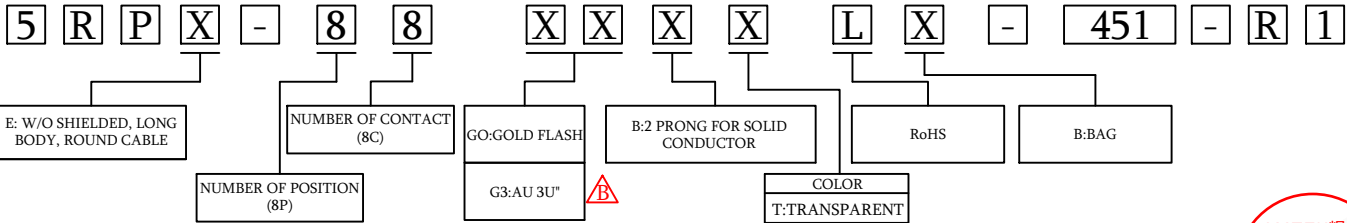

BINARY PIECE STRAND WIRE



ROUND WIRE

△	BPM No.: 20240709004 Add the plated options	Benson	2024/07/10
△	BPM No.: 20240516001	Randy	2024/05/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MODULAR PLUG				頁數 Page	1/1
品號 PART NO.	5RPX-88XXXXLX-451-R1				繪圖 DRAWN	Randy 2024/05/16
圖號 DRAWING NO.	GN169-RD480	版本 REV.	B	核對 CHECKED	Josh 2024/05/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/05/16	
公差 TOLERANCE	.x±0.30 .xx±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		