
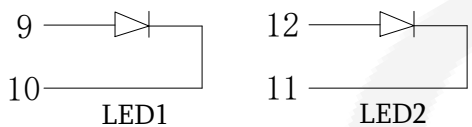
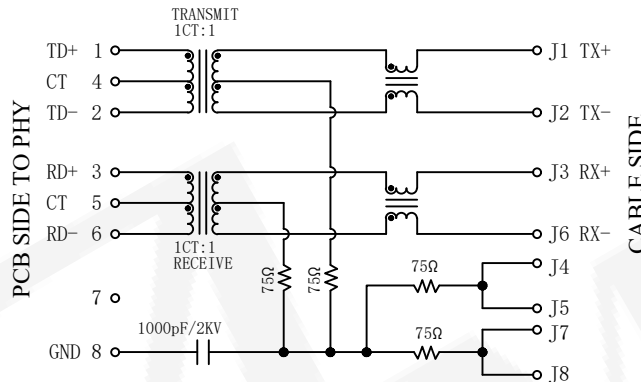


MATERIAL:
HOUSING : PBT,UL94V-0,BLACK.
TERMINALS BRACKET: PBT,UL94V-0,BLACK.
SHIELD: C2680,T=0.20mm,NICKEL PLATING ON ALL AREA.
TERMINAL: PHOSPHOR BRONZE C5210,T=0.35mm,

MECHANICAL:
DURABILITY : 750 CYCLES MIN.
MATING FORCE : 23N MAX.
OPERATING TEMPERATURE: -40°C~+85°C.

Electrical:
1.TURN RATIO: 1~2:J1~J2=1CT:1CT(±2%).
3~6:J3~J6=1CT:1CT(±2%).
2.OCL:350uH MIN.AT 100KHz 100mV 8mA DC.
3.INSERTION LOSS: -1.0 dB MAX 1~100MHz.
4.RETURN LOSS: -20dB MIN 1~10MHz;
-16dB MIN 10~30MHz;
-12dB MIN 30~60MHz;
-10dB MIN 60~80MHz;
5.CROSS TALK: -40dB MIN 1~30MHz;
-35dB MIN 30~60MHz;
-30dB MIN 60~100MHz;
6.CMR: -30dB MIN 1~100MHz;
7.HI-POT: 1500V AC & 2250V DC
6S 1mA PRI TO SEC



ORDER INFORMATION

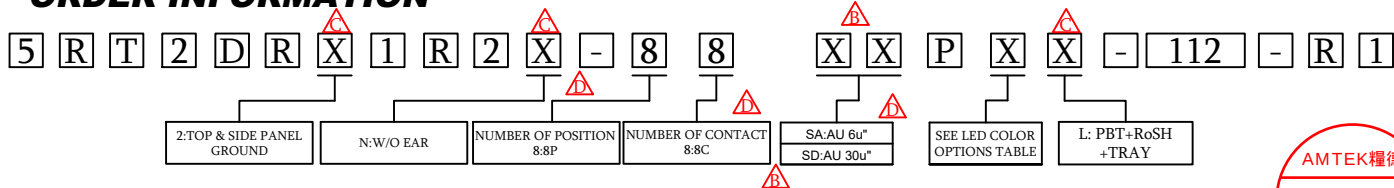

LED COLOR OPTIONS TABLE		
LED1	LED2	No.
YELLOW	GREEN	1
YELLOW	YELLOW	2
GREEN	YELLOW	3
GREEN	GREEN	4

LED SPECIFICATION

STANDARD LED COLOR	LED WAVELENGTH	FOWARD(A)	FOWARD(V)
GREEN	565nm	20mA	1.85-2.45V
YELLOW	590nm	20mA	1.7-2.2V

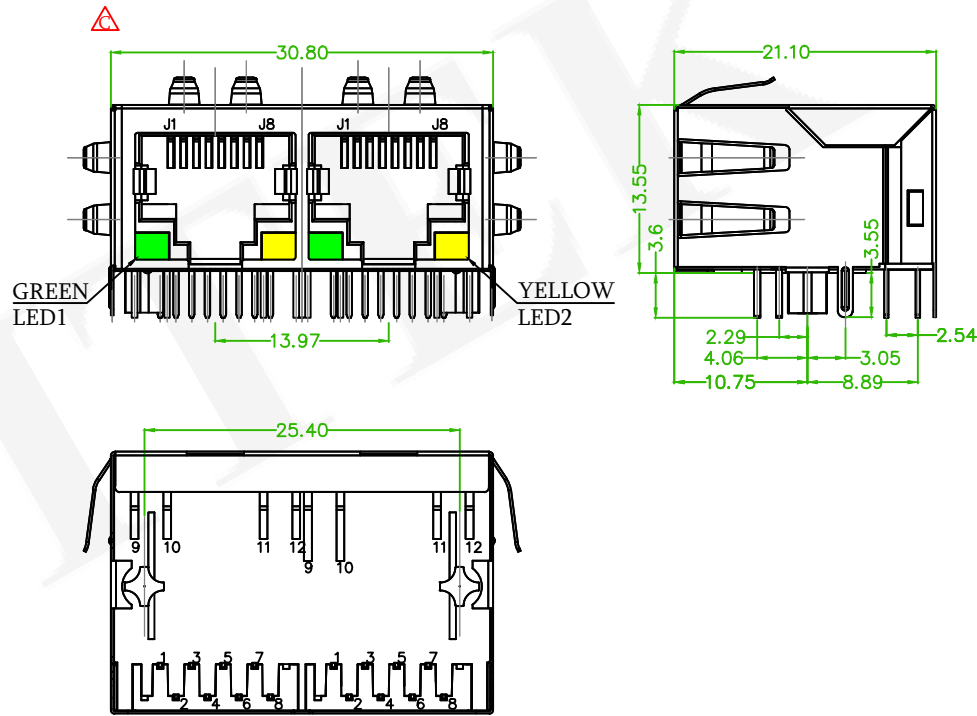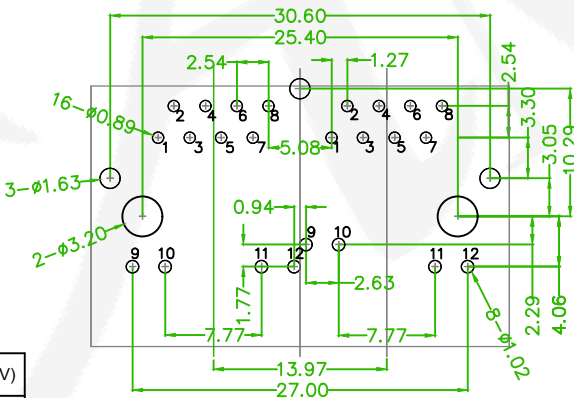

	品名 TITLE	MODULAR JACK TRANSFOEMER DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5RT2DRX1R2X-88XXPPXX-112-R1				繪圖 DRAWN	Mia 2018/08/09
	圖號 DRAWING NO.	GN169-MD376	版本 REV.	D	核對 CHECKED	Josh 2018/08/09	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/08/09	
	公差 TOLERANCE	.X ±0.30 .XX±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

Easyflow No.: 202404020007	Revise the drawing	Randy	2024/04/08
ECN NO.230313:	Revise the drawing	Rex	2023/03/27
Add the Option: SA,	Revise the Info and Part No.	Daniel	2019/07/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE