

ORDER INFORMATION



SPECIFICATION

CONTACT RESISTANCE: 30mΩ MAX.
INSULATOR RESISTANCE: 100 MΩ MIN.
DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
OPERATING TEMPERATURE :-25°C ~ +85°C

MATERIAL

HOUSING: PPS,UL94V-0
CONTACT: PHOSPHOR BRONZE

5 S B D 1 2 2 0 M 0 - X X X U X - J 0 1

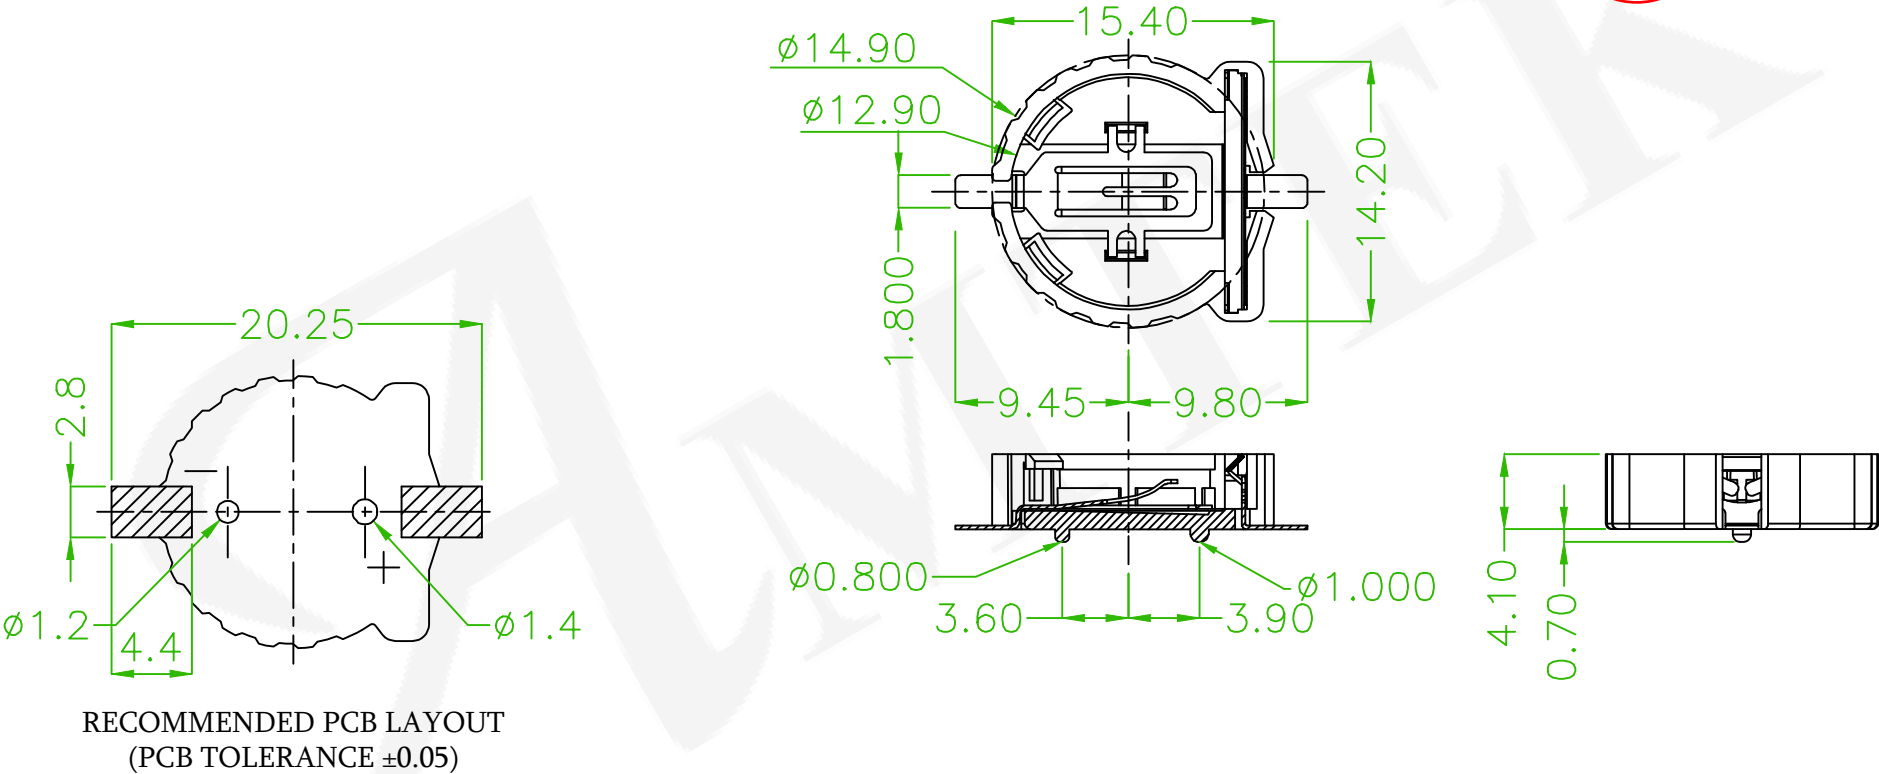

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BATTERY HOLDER				頁數 Page	1/1
	品號 PART NO.	5SBD1220M0-XXXUX-J01				繪圖 DRAWN	Gaby 2024/03/28
	圖號 DRAWING NO.	GN224-GY596	版本 REV.	B	核對 CHECKED	Josh 2024/03/28	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/03/28	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.XXX±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	

	QEC NO.: 240605 Revise the drawing	Gaby	2024/06/05
	Easy Flow 202403270007	Gaby	2024/03/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE