

MATERIAL

Housing:PBT,UL94V-0

Top Contact:Spring Steel,T=0.4mm

Bottom Contact:Steel,0.9mm Dia

ORDER INFORMATION




5 S B D 1 2 2 5 D 0 - T 0 B L B - A 0 1

T0: Tin Plated



B: Black

RoHS

B: Bag

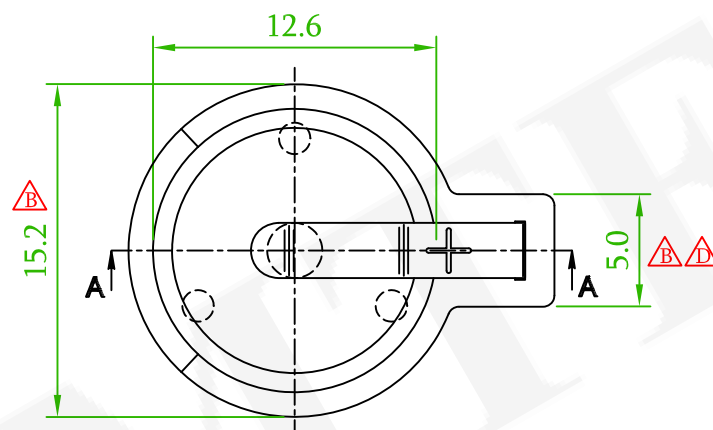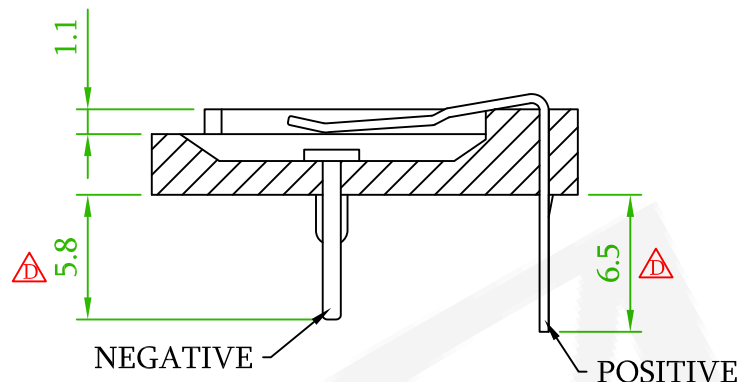

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

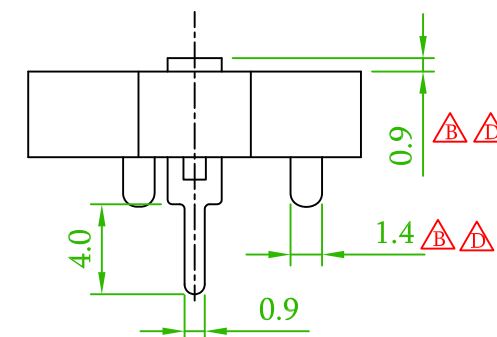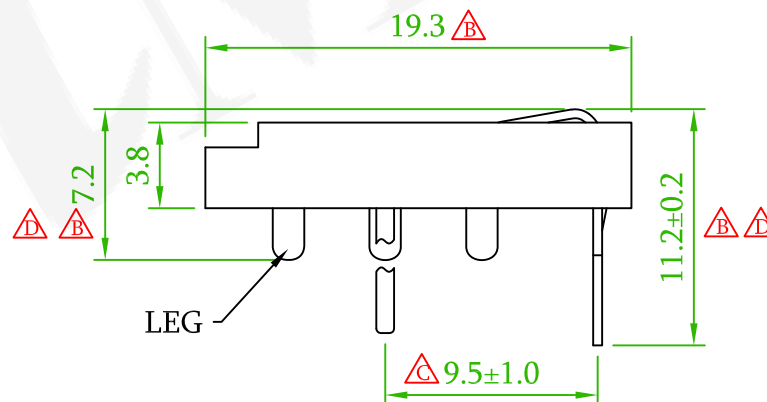

Old P/N: 5SBD0D0-1225T0BL-02

Δ x7	Revise the dimensions	Nick	2019/06/03
Δ x1	Revise the tolerance: 9.5±0.1 -> 9.5±1.0.	2018/06/19	Gary
Δ x7	ECN NO.: 180505, revise dimensions: 14.8->15.2, 5->5.1, 7.5->6.7, 19->19.3, 11.3->10.5, 1.4->0.6, 1.4->1.5.	2018/05/16	Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		BATTERY HOLDER				頁數 Page	1/1
品號 PART NO.	5SBD1225D0-T0BLB-A01	繪圖 DRAWN	Roy			2017/06/15	
圖號 DRAWING NO.	GN036-GB153	版本 REV.	D	核對 CHECKED	Josh	2018/06/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason	2018/06/19	
公差 TOLERANCE	.X $\pm$ 0.20 .XX $\pm$ 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION			