

SPECIFICATIONS

CONTACT RESISTANCE: 30mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE
OPERATION TEMPERATURE: -25 °C TO +85 °C



MATERIAL

HOUSING: LCP, UL94V-0, NATURAL
CONTACT: PHOSPHOR BRONZE



ORDER INFORMATION

5 S B D 2 0 3 2 D A - X X X U X - J 0 1

NI: NICKEL PLATED
W: NATURAL
RoHS
A: TRAY W/O CAP

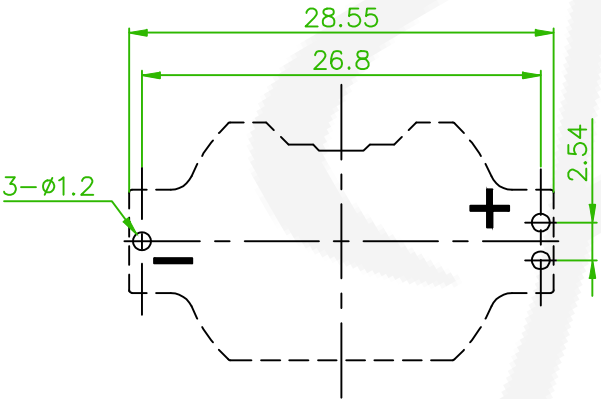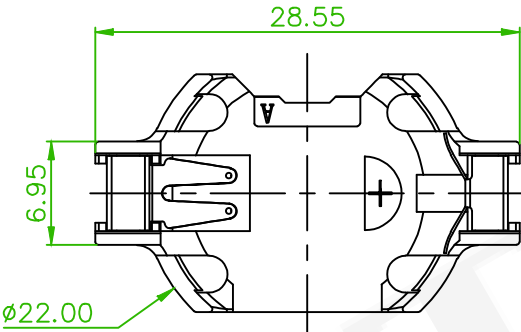

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

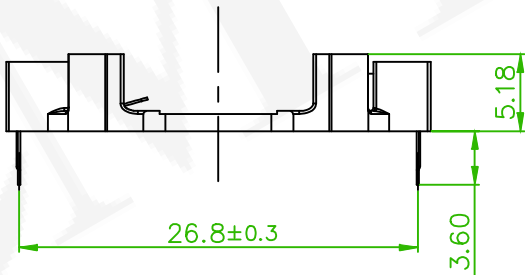

△	ECN NO.240335:Revise the Drawing	Alice	2024/04/08
△	QEC No.: 240313 Revise the drawing	Randy	2024/03/29
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BATTERY HOLDER 2032 DIP V/T TYPE				頁數 Page	1/1
	品號 PART NO.	△5SBD2032DA-XXXUX-J01				繪圖 DRAWN	Rex 2023/02/07
	圖號 DRAWING NO.	GN224-RE076	版本 REV.	C	核對 CHECKED	Josh 2023/02/07	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/02/07	
	公差 TOLERANCE	.X±0.25 .XX±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		