

SPECIFICATIONS

DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
INSULATION RESISTANCE: 100MΩ MIN.
CONTACT RESISTANCE: 100mΩ MAX.
OPERATION TEMPERATURE: -25°C TO +85°C

MATERIAL

HOUSING: PBT
CONTACT: STEEL

ORDER INFORMATION



5SBD2032DC-XXXLX-J01

Ni: NICKEL PLATED

B: BLACK

RoHS

X: BOX

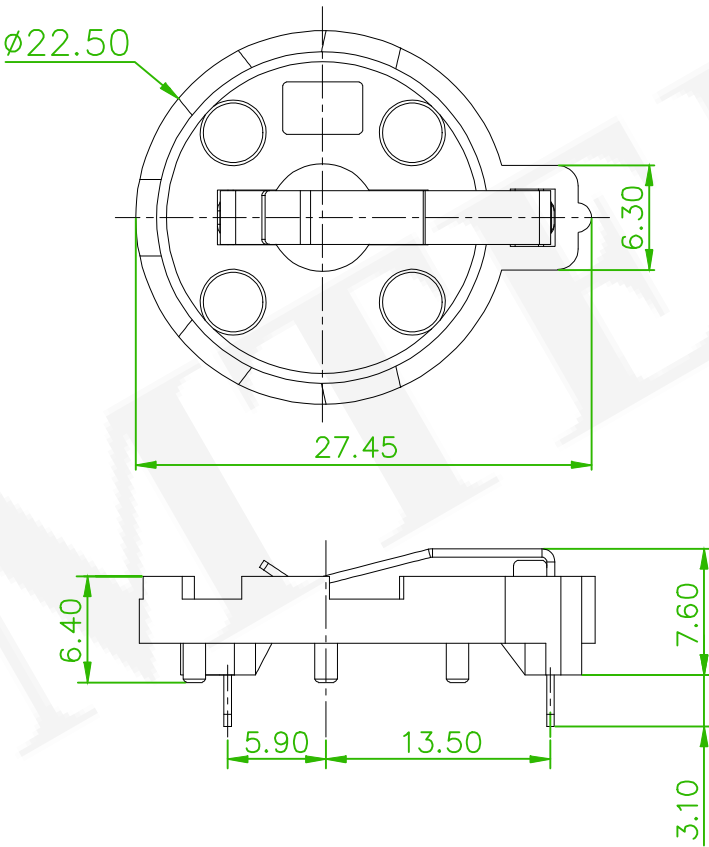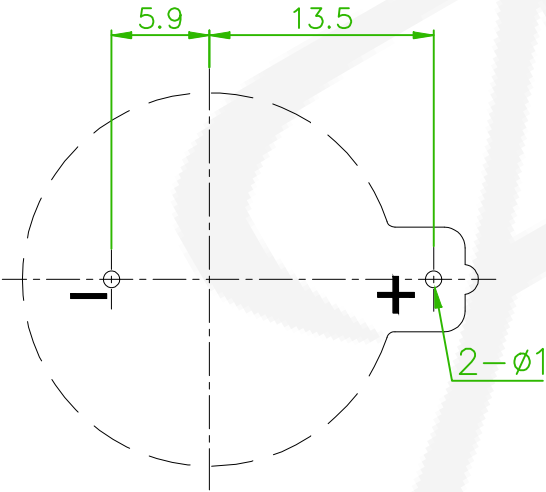

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

REV.	EasyFlow202403200005	Benson	2024/03/25
	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	BATTERY HOLDER 2032 DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5SBD2032DC-XXXLX-J01				繪圖 DRAWN	Benson 2024/03/25
圖號 DRAWING NO.	GN224-BE487	版本 REV.	A	核對 CHECKED	Josh 2024/03/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2024/03/25	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		