

ORDER INFORMATION

SPECIFICATION


CONTACT RESISTANCE: 50mΩ MAX.
INSULATOR RESISTANCE: 100 MΩ MIN.
DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
OPERATING TEMPERATURE :-25°C ~ +85°C

MATERIAL


HOUSING: PBT,UL94V-0
TERMINAL(+): PHOSPHOR BRONZE,T:0.4mm
TERMINAL(-): PHOSPHOR BRONZE,T:0.2mm

5 S B D 2 0 3 2 D D - X X X L X - J 0 1

T0:TIN PLATED B:BLACK L:RoSH A:TRAY W/O CAP

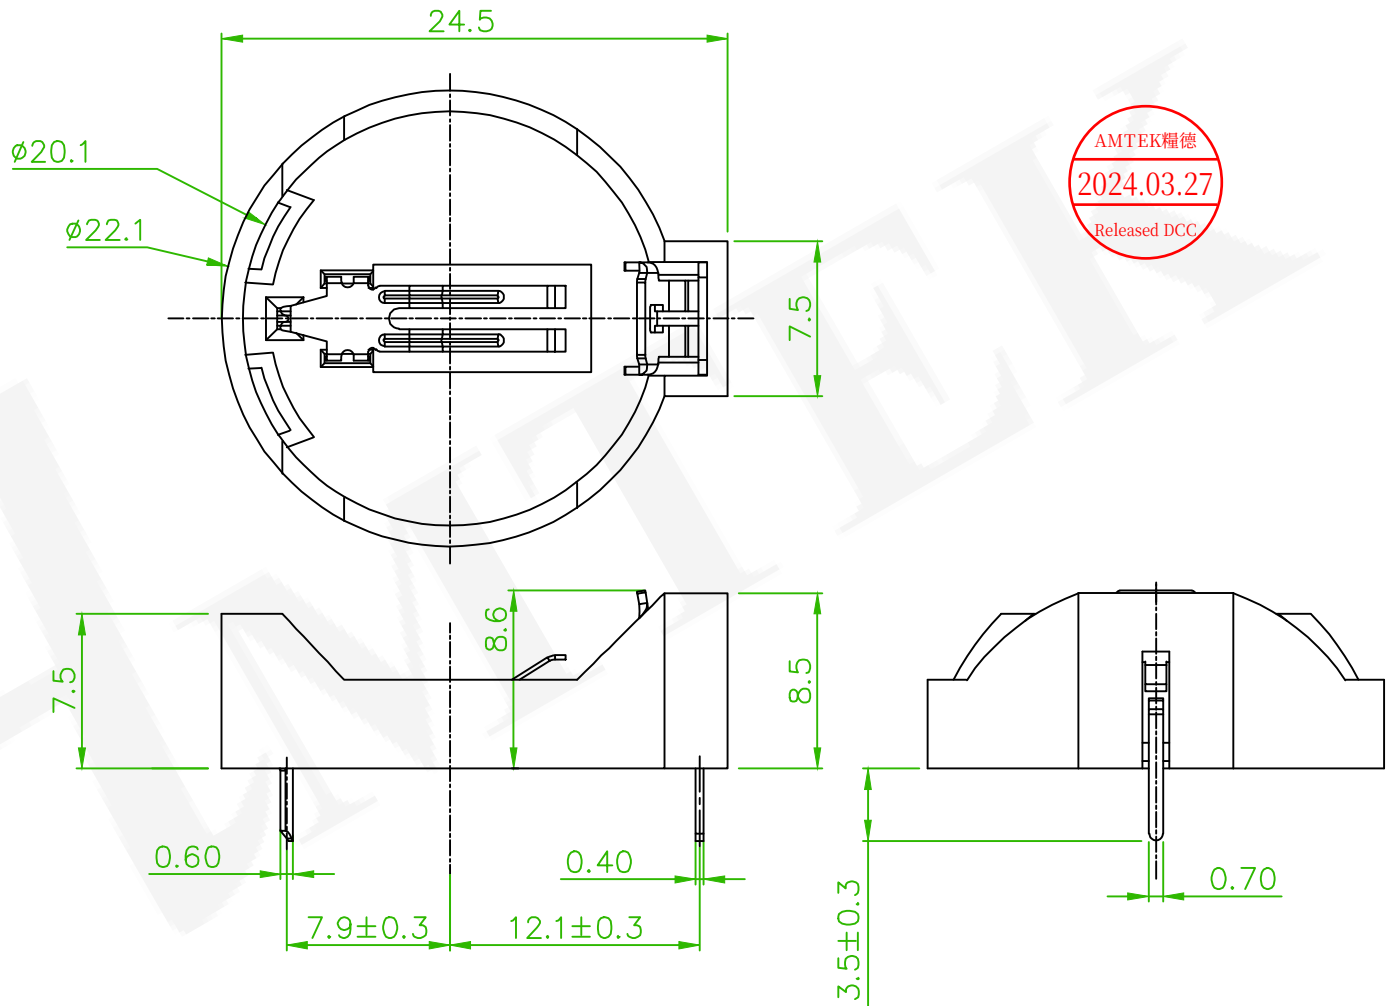

AMTEK 糧德
2024.03.27
Released DCC

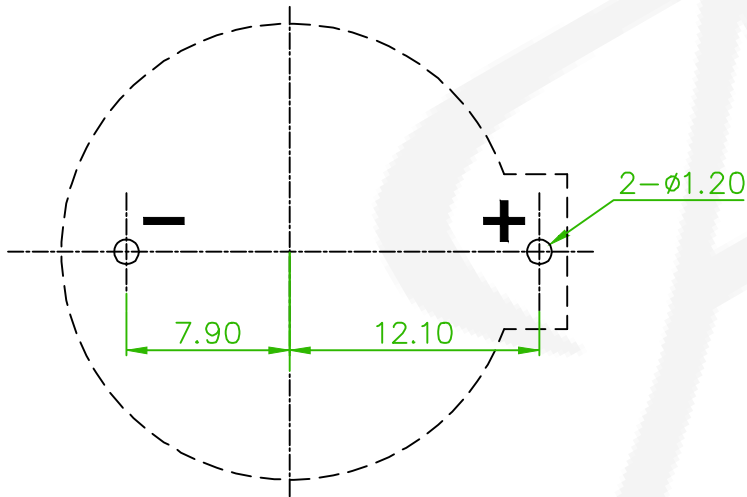

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BATTERY HOLDER				頁數 Page	1/1
	品號 PART NO.	5SBD2032DD-XXXLX-J01				繪圖 DRAWN	Gaby 2024/03/21
	圖號 DRAWING NO.	GN224-GY576	版本 REV.	A	核對 CHECKED	Josh 2024/03/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/03/21	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	X° $\pm 1^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	Easy Flow 202403250006	Gaby	2024/03/21