

ORDER INFORMATION

SPECIFICATION


CONTACT RESISTANCE: 50mΩ MAX.
INSULATOR RESISTANCE: 100 MΩ MIN.
DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
OPERATING TEMPERATURE :-25°C ~ +85°C

MATERIAL


HOUSING: NYLON66,UL94V-0
TERMINAL(+): PHOSPHOR BRONZE,T:0.2mm
TERMINAL(-): PHOSPHOR BRONZE,T:0.2mm

5 S B D 2 0 3 2 D F - X X X L X - J 0 1

T0:TIN PLATED	B:BLACK	L:RoSH	A:TRAY W/O CAP
---------------	---------	--------	----------------

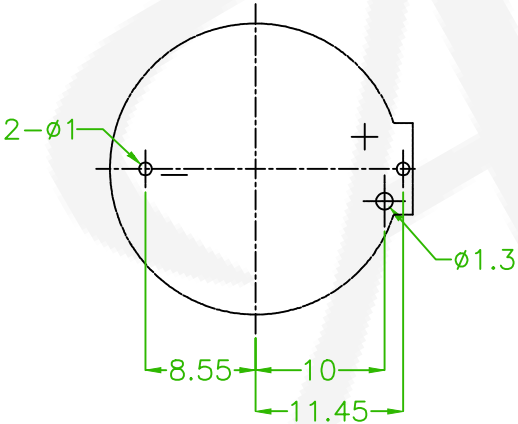

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

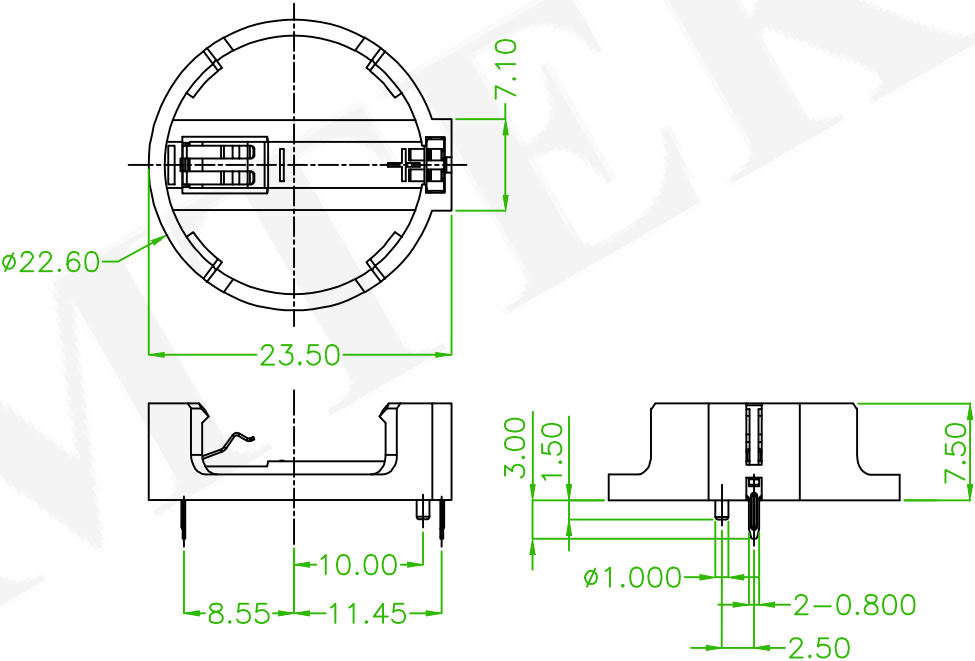

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	Easy Flow 202403200005	Gaby	2024/03/21



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	BATTERY HOLDER 2032 DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5SBD2032DF-XXXLX-J01				繪圖 DRAWN	Gaby 2024/03/21
圖號 DRAWING NO.	GN224-GY575	版本 REV.	A	核對 CHECKED	Josh 2024/03/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/03/21	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.XXX±0.1 X°±1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	