

ORDER INFORMATION

SPECIFICATIONS

CONTACT RESISTANCE: 30mΩ MAX. △B
OPERATION TEMPERATURE: -30°C TO +85°C △B

MATERIAL

HOUSING: LCP+G.F, UL94V-0
CONTACT: PHOSPHOR BRONZE, T=0.15mm

5 S B D 2 0 3 2 M 1 - X X X U X - A 0 1


△D

GO:GOLD
FLASH
NI:NICKEL
PLATED


W:NATURAL

RoHS

A:TRAY
H:T/R

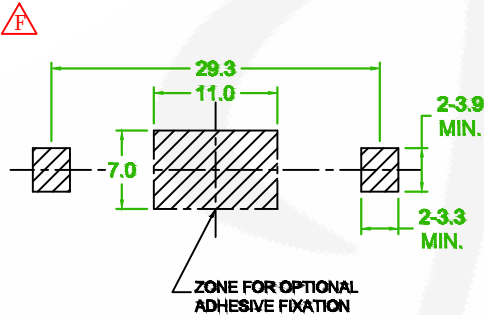

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

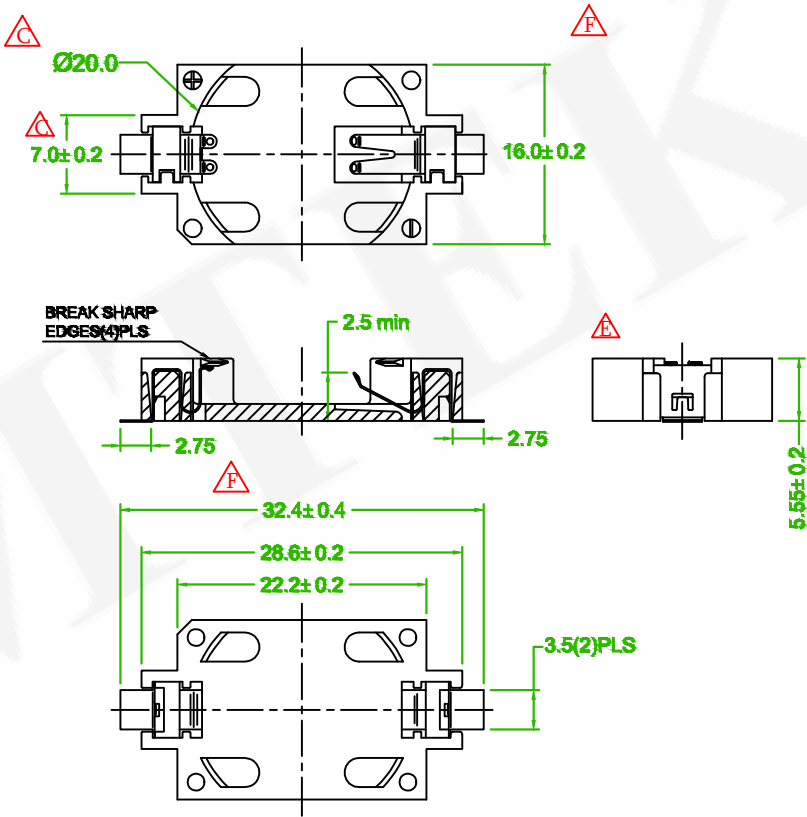

Old P/N:BTM-2032GWX-U

△F	ECN-202411008 Revise the drawing	Gaby	2024/12/04
△E x1	ECN NO.:220122 Revise the drawing	Alice	2022/05/21
△D x1	Add the Plated option(NI)	Nick	2019/10/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BATTERY HOLDER 2032 SMT V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5SBD2032M1-XXXUX-A01				繪圖 DRAWN	Roy 2017/05/22
	圖號 DRAWING NO.	GN036-RL757	版本 REV.	F	核對 CHECKED	JOSH 2018/08/30	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/08/30	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	