

SPECIFICATION

CONTACT RESISTANCE: 50mΩ MAX.
INSULATOR RESISTANCE: 100 MΩ MIN.
DIELECTNIC VOLTAGE: 500V AC FOR ONE MINUTE
OPERATING TEMPERATURE :-25°C~+85°C





MATERIAL

HOUSING: LCP,UL94V-0
CONTACT: PHOSPHOR BRONZE

ORDER INFORMATION

5 S B D 2 0 3 2 M 1 - X X X U X - J 0 1

T0:TIN PLATED B:BLACK U:RoSH A:TRAY

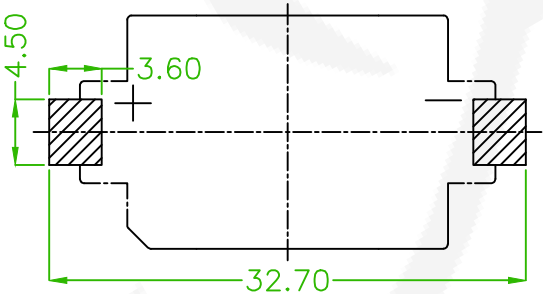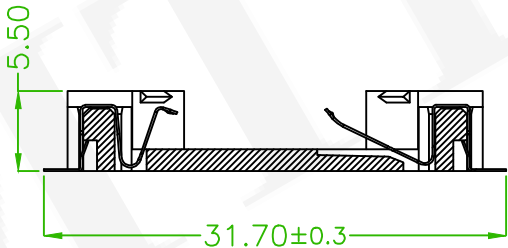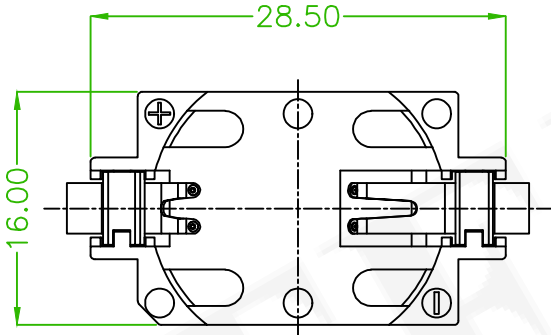

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	BATTERY HOLDER 2032 SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	5SBD2032M1-XXXUX-J01				繪圖 DRAWN	Randy 2024/04/01
圖號 DRAWING NO.	GN224-RD419	版本 REV.	A	核對 CHECKED	Josh 2024/04/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/04/01	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	EasyFlow No.: 202403200005	Randy	2024/04/01
	ECN NO. OR DESCRIPTION	REVISED	DATE