

ORDER INFORMATION



SPECIFICATION

CONTACT RESISTANCE: 100mΩ MAX.
INSULATOR RESISTANCE: 100 MΩ MIN.
DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
OPERATING TEMPERATURE :-25°C ~ +85°C


MATERIAL

HOUSING: PA66,UL94V-0
CONTACT: BRASS

5 S B D 2 0 3 2 U G - X X X L X - J 0 1

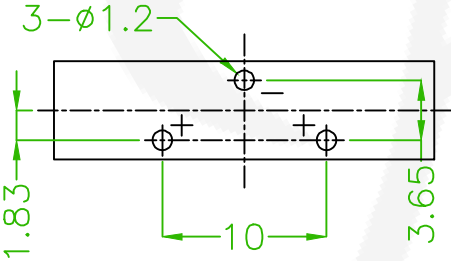

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

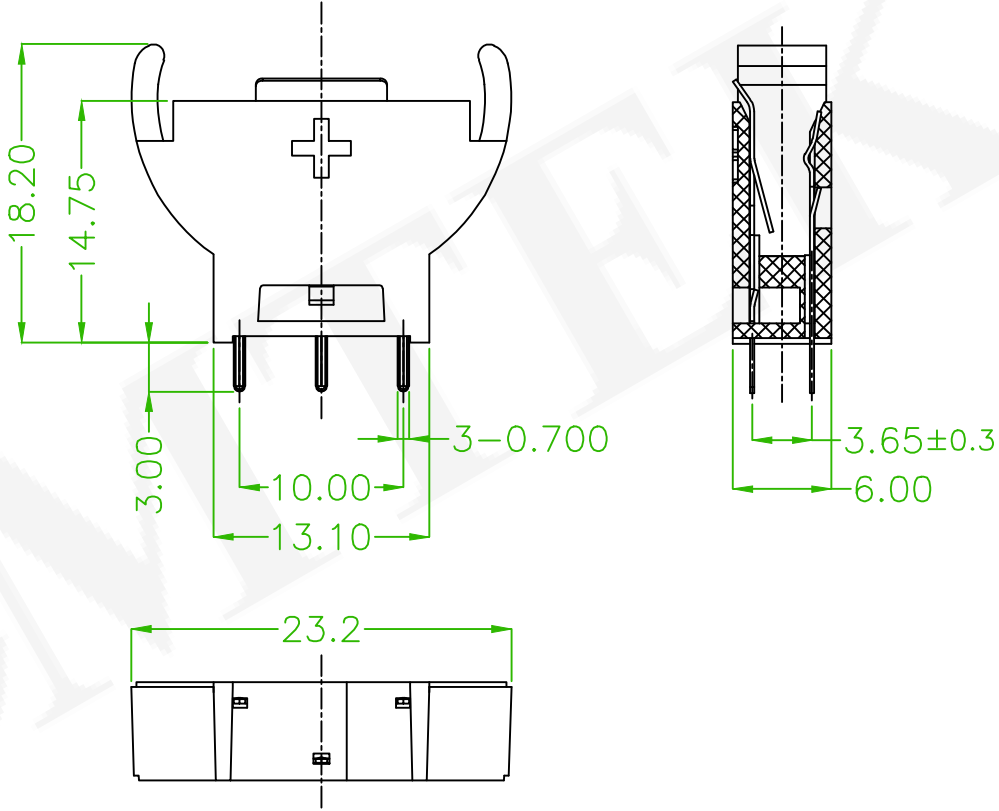

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	BATTERY HOLDER 2032 DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5SBD2032UG-XXXLX-J01				繪圖 DRAWN	Gaby 2024/04/02
圖號 DRAWING NO.	GN224-GY603	版本 REV.	A	核對 CHECKED	Josh 2024/04/02	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/04/02	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	Easy Flow 202404010001	Gaby	2024/04/02