

SPECIFICATION

Contact Resistance:30mΩ Max.

Insulator Resistance:1000 MΩ Min.

Dielectric Voltage:500V AC for one minute

Operating Temperature:-55°C to +105°C

MATERIAL

Housing:PBT+G.F,UL94-HB △B

Contact:Brass

ORDER INFORMATION

5 S B D 2 4 5 0 D 0 - T 0 B L X - A 0 1

T0:Tin Plated

B:Black

RoHS


X:Box




AMTEK 耀德

2022.10.25



Released DCC

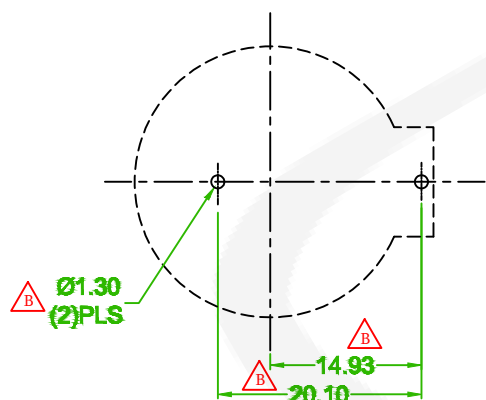


Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

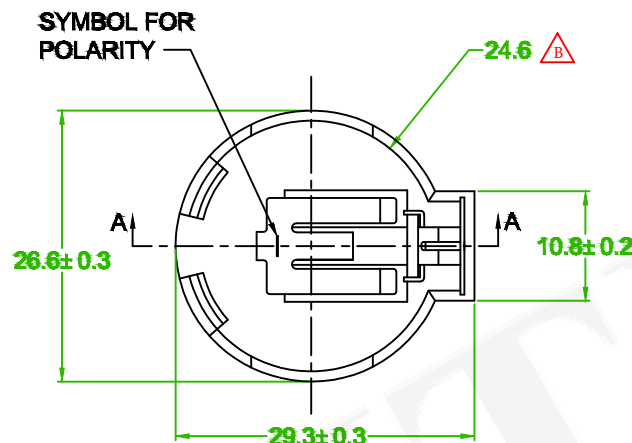

BREAK SHARP
EDGES(2) PLS

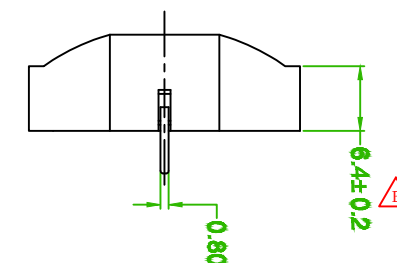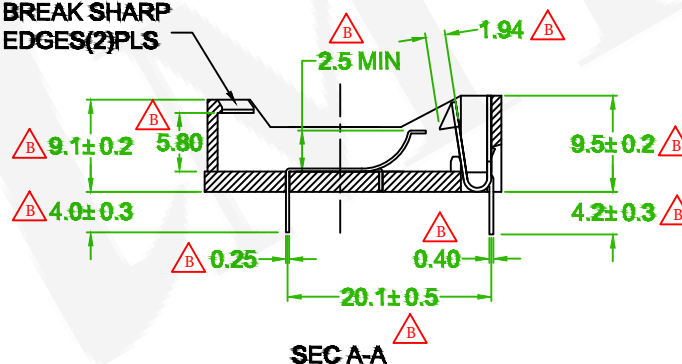

Old P/N:BTD-2450TB-L



品名 TITLE	BATTERY HOLDER				頁數 Page	1/1
品號 PART NO.	5SBD2450D0-T0BLX-A01				繪圖 DRAWN	Roy 2017/06/15
圖號 DRAWING NO.	GN036-AB650	版本 REV.	B	核對 CHECKED	Jerry 2017/06/15	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jerry 2017/06/15	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	X° $\pm 3^\circ$		單位 UNIT	mm	THIRD ANGLE PROJECTION

QEC NO.:220904 Revise the drawing

Alice

2022/10/25

ECN NO. OR DESCRIPTION

REVISED

DATE