

MATERIAL






INSULATOR: LCP+G.F. ,UL94V-0
CONTACT PIN: PHOSPHOR BRONZE, T=0.15mm

ORDER INFORMATION

5 S B D 2 4 5 0 M 0 - X X X U X - A 0 1

G0:GOLD FLASH	W:NATURAL	RoHS	A:TRAY
			H:T/R W/O CAP

AMTEK 耀德
2024.03.15
Released DCC

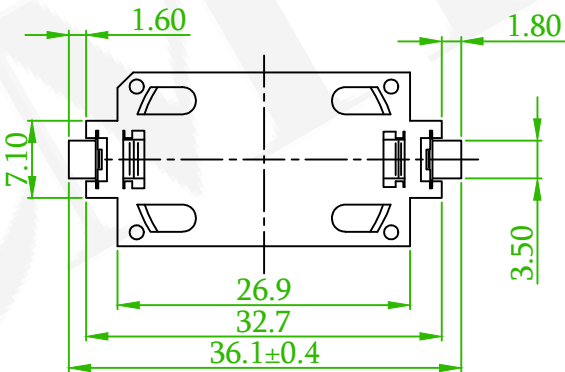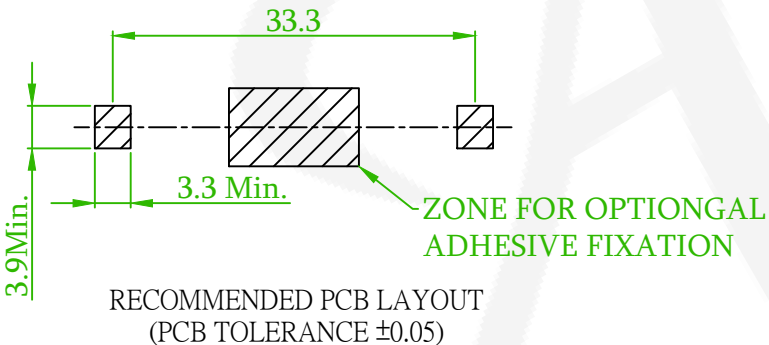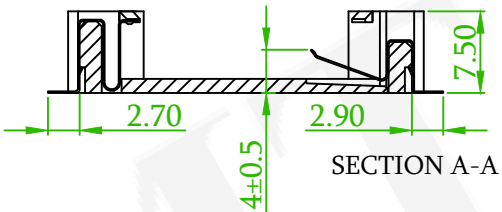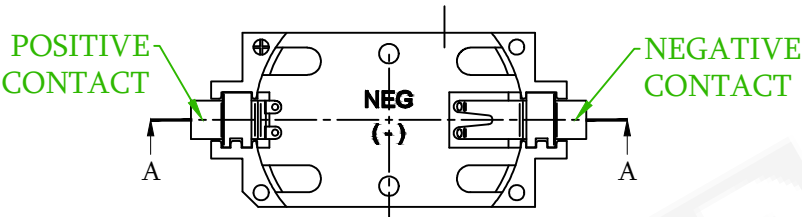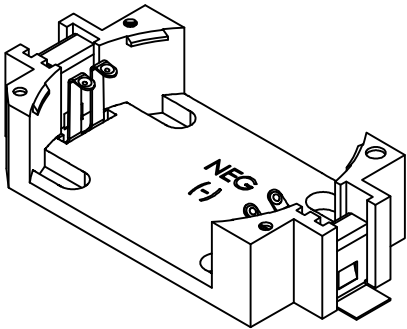

△	EasyFlow No.: 202403140004 Add the Options	Randy	2024/03/15
△x1	ECN NO.:220122 Revise the drawing	Alice	2022/05/21
△x1	Revise the information	Nick	2019/04/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	BATTERY HOLDER				頁數 Page	1/1
品號 PART NO.	5SBD2450M0-XXXUX-A01			繪圖 DRAWN	Gary 2017/10/16	
圖號 DRAWING NO.	GN036-GA681	版本 REV.	D	核對 CHECKED	Jason 2017/10/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/10/16	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		