

ORDER INFORMATION

5 T 5 7 0 0 F - X X X K X X

B:BRASS

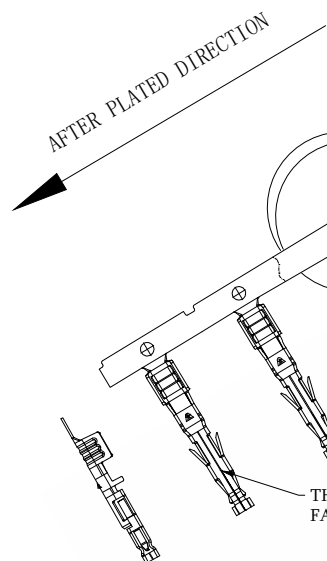

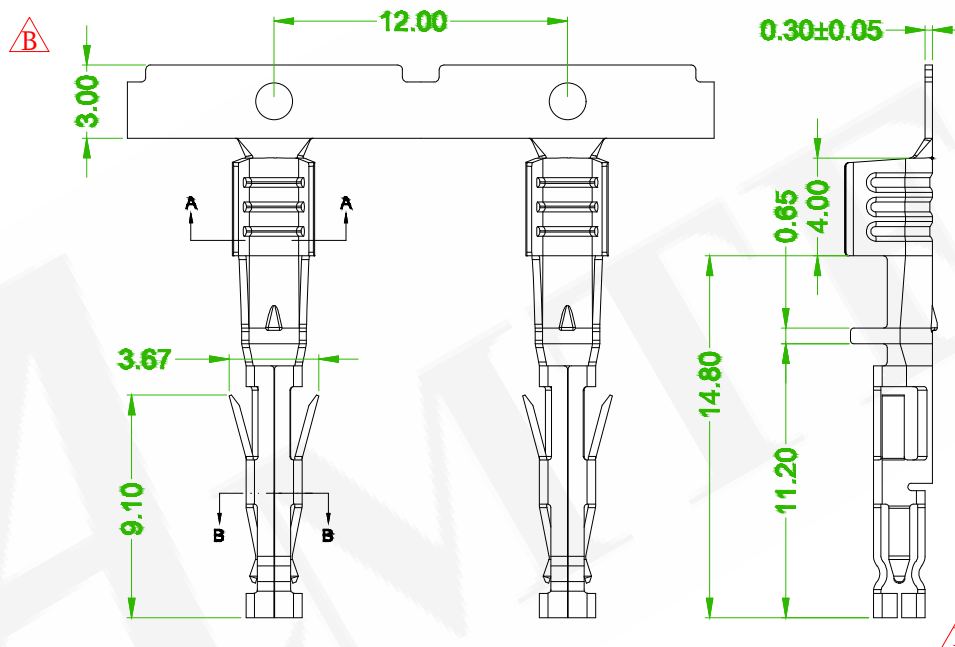


T0:TIN PLATED

G0:GOLD FLASH

R:TAPE&REEL

01: AWG #14 / #16

02: AWG #12

THE CRIMP OPENING SHALL
FACE UPWARD AS SHOWN.SECTION A-A
CONDUCTOR CRIMP 12 AWGSECTION A-A
CONDUCTOR CRIMP 14/16 AWG

SECTION B-B

P/N	WIRE RANGE	INSULATION O.D.	MATERIAL
5T5700F-BXXXX01	AWG#14 / #16	4.0mm MAX.	HIGH CONDUCTIVE BRASS
5T5700F-BXXXX02	AWG#12		



懰德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL				頁數 Page	1/1
品號 PART NO.	5T5700F-XXXXKXX(01-02)				繪圖 DRAWN	Gaby 2024/03/25
圖號 DRAWING NO.	GN137-GY579	版本 REV.	B	核對 CHECKED	Josh 2024/03/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/03/25	
公差 TOLERANCE	.X±0.30 .XX±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	ECN-202607038	Gaby	2026/08/04
A	Easy Flow 202403210004	Gaby	2024/03/25