

ELECTRICAL

RATED VOLTAGE: 300V
RATED CURRENT: 20A
CONTACT RESISTANCE:20mΩ
WIRE RANGE: 22-12AWG
WITHSTANDING VOLTAGE: AC 1600V FOR ONE MIN
INSULATION RESISTANCE: 500MΩ / DC 500V

ORDER INFORMATION

5

T

B

9

5

0

N

-

J

4

9

E

X

X

X

L

X

-

W

1

950:
PITCH9.5mm

SERIES No.

No OF POLES TOTAL
(02~26)

B:BLACK




B:BAG

MECHANICAL

TORQUE: 0.8N.m
TEMP. RANGE: -40°C ~ +105°C
SOLDERING:+260°C ,FOR 5 SEC

MATERIAL

HOUSING: NYLON 66, UL94V-0
SCREWS: M3.5, STEEL,Ni PLATED
PIN HEADER: COPPER ALLOY,Ni PLATED

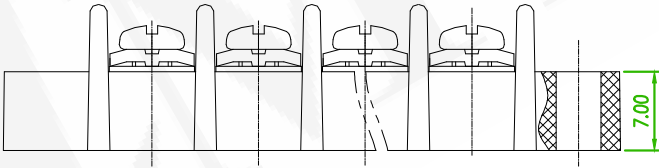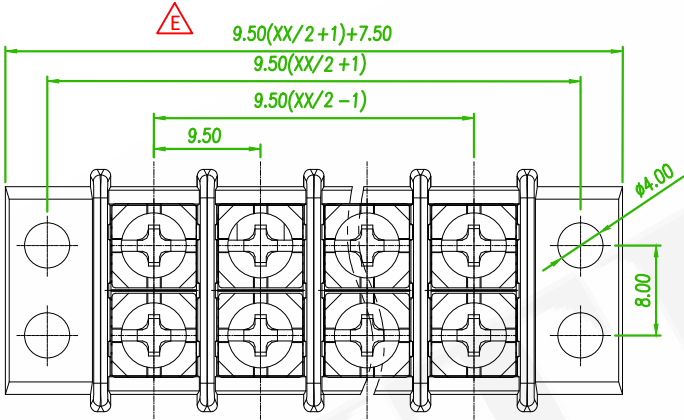

linear dimension(Tolerances Standard GB/T 14486-2008)								—	▯	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△E	ECN-202504042 Revise the drawing	Gaby	2025/05/16
△D	ECN NO:240348 Revise the drawing	Gaby	2025/02/13
△C3	ECN NO:200718 Revise the Tolerance & ECN NO:201211 Revise the PART NO.	Alice	2020/12/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懌德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 9.50mm				頁數 Page	1/1
品號 PART NO.	5TB950N-J49EXXXLX-W1				繪圖 DRAWN	MIA 2016/08/03
圖號 DRAWING NO.	GN011-NI732	版本 REV.	E	核對 CHECKED	BORIS 2016/08/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	BORIS 2016/08/03	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		