


Electrical

Rated Voltage: 300V
Rated Current: 20A
Contact Resistance: 20mΩ
Wire Range: 22-12AWG
Withstanding Voltage: AC 1600V for one min
Insulation resistance: 500MΩ / DC 500V

ORDER INFORMATION

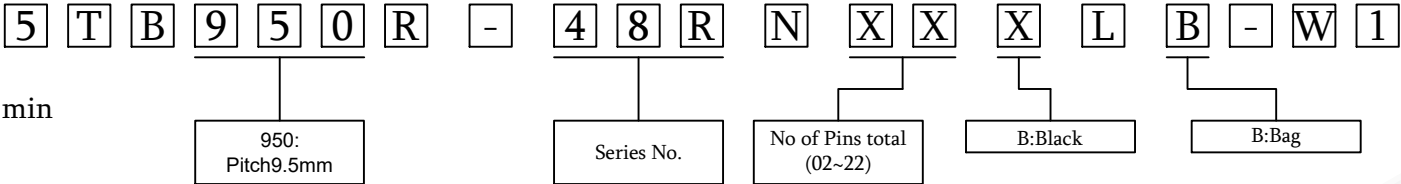





AMTEK 糧德
2024.01.17
Released DCC

Mechanical

Torque: 1.2Nm(10.6Lb.in)
Temp. Range: -40°C ~ +105°C

Material

Housing: PA66, UL94V-0
Screws: M4, Steel, Ni Plated
Pin Header: Copper alloy Sn plated
Cover: PC, UL94V-2

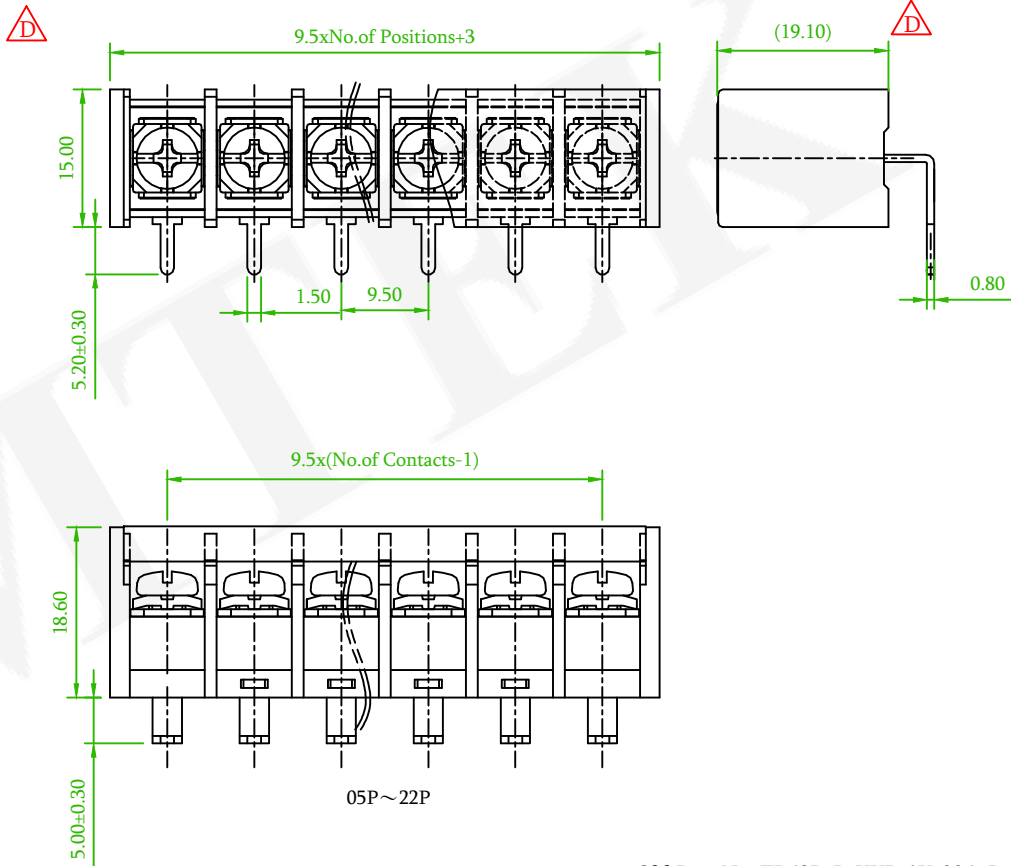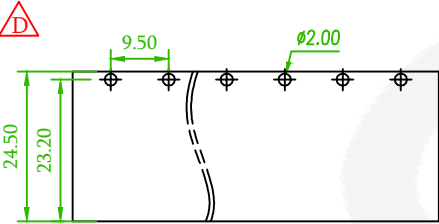

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
△	QEC NO.240102: Revise the Drawing							Gaby	2024/01/12	
△x3	ECN NO:200718 Revise the Tolerance & ECN NO:201211 Revise the PART NO.							Alice	2020/12/23	
△x1	ECN 200102: Remove the IEC							David	2020/06/06	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

AMTEK

糧德精密有限公司

Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名	Terminal Block				頁數	1/1
TITLE	Terminal Block				繪圖	Andy
品號	△5TB950R-48RNXXXLB-W1				DRAWN	2018/02/09
圖號	GN011-AA407		版本	D	核對	Josh
DRAWING NO.			REV.		CHECKED	2018/02/09
客戶品號			比例	None	承認	Jason
CUSTOMER P/N			SCALE		APPROVED	2018/02/09
公差			單位	mm	THIRD ANGLE PROJECTION	
TOLERANCE			UNIT			

Old Part No.:TB48R-B-XXP-1X-00A-L