



ELECTRICAL  
STANDARD: UL IEC
RATED VOLTAGE: 300V 450V
RATED CURRENT: 26A 24A
CONTACT RESISTANCE: 20mΩ
WITHSTANDING VOLTAGE: AC 1600V FOR ONE MIN
INSULATION RESISTANCE: 500mΩ/DC 500V
WIRE RANGE: 20-10AWG 2.5mm²

ORDER INFORMATION

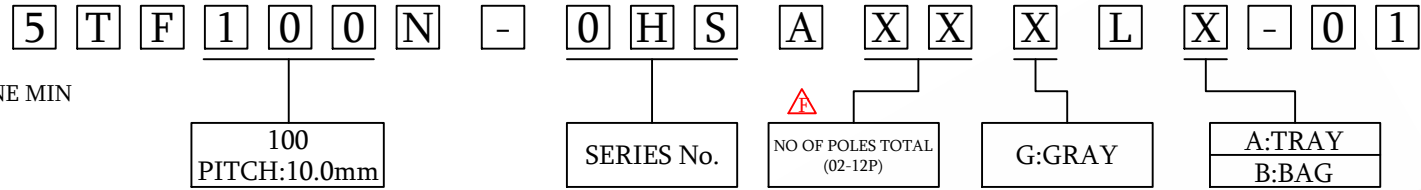

MECHANICAL
TEMP. RANGE: -40°C ~ +105°C
TORQUE: 0.5Nm
STEIP LENGTH: 7-8mm

MATERIAL
HOUSING: NYLON66, UL94V-2
CAGE:SPCC,M3/Zn PLATED
SCREW:STEEL,M3

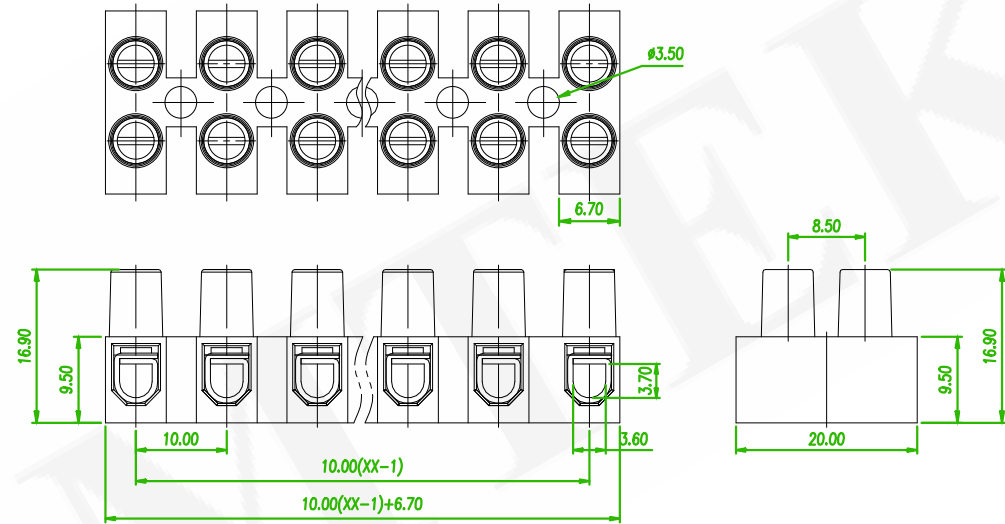

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN 202502009	Willy	2025/03/07
	ECN NO:240348 Revise the drawing	Gaby	2024/12/02
	ECN NO:230714 Revise the PART NO.	Benson	2023/08/29
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK FEED THROUGH 10.0mm				頁數 Page	1/1
品號 PART NO.	5TF100N-OHSAXXLX-01				繪圖 DRAWN	Eric 2018/12/27
圖號 DRAWING NO.	GN011-EA412	版本 REV.	F	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		