MECHANICAL
STANDARD: UL
RATED VOLTAGE: 600V
RATED CURRENT: 26A
WITHSTANDING VOLTAGE:AC 2000V FOR ONE MINUTE
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 500MΩ/DC500V
WIRE RANGE: 20-10AWG(UL) 1-6mm²(IEC)

ORDER INFORMATION

5 T F 1 0 0 N - 0 H S B X X X L X - 0 2

- 100: PITCH10.0mm
- SERIES NO.
- NO OF POLES TOTAL (12)
- W:NATURAL
- X:BOX

AMTEK糧德 2025.03.12 Released DCC

MECHANICAL
TEMP. RANGE: -40°C ~ +105°C
TORQUE:0.5Nm(4.51b`in)
STRIP LENGTH:7-8mm

MATERIAL
HOUSING: NYLON 66, UL94V-2
SCREWS: M3,STEEL, ZINC PLATED
CURRENT CARRIER: SPCC, ZINC PLATED

NOTE
SYMBOL " 02 " MEANS SERIAL AS ORDER INFORMATION SHOWN

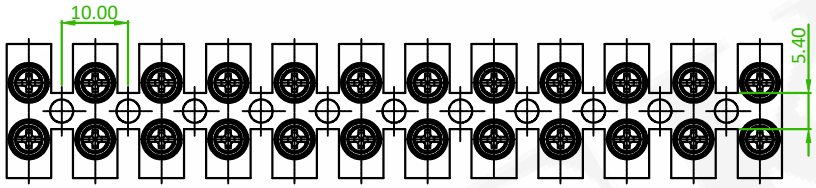

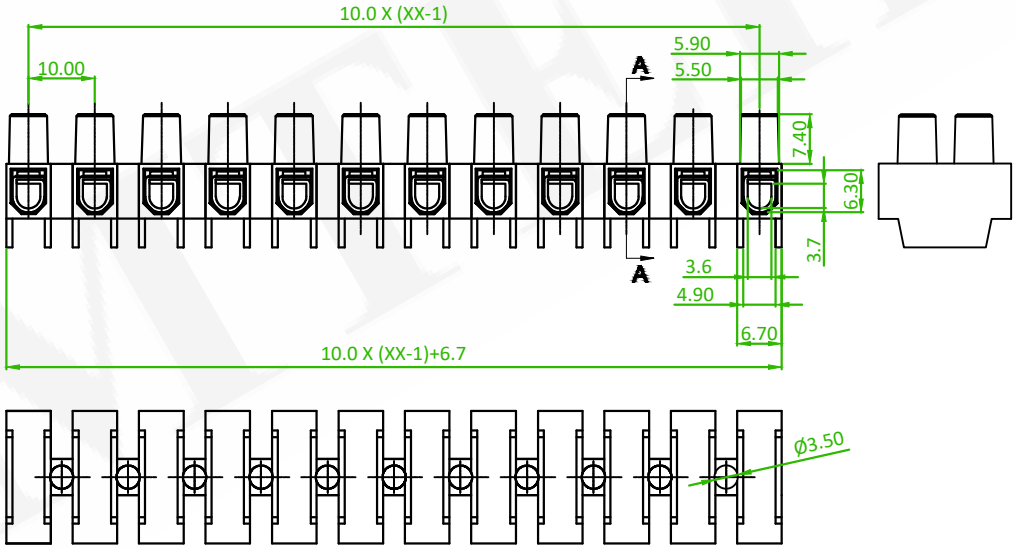



Section A-A

B

linear dimension(Tolerances Standard GB/T 14486-2008)								—	▱	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Old Part No. :TB10HS-4.3-12P-19-00A-S01-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
E	ECN 202502009	Willy	2025/03/07
D	ECN NO:230717 Revise the PART NO.	Benson	2023/08/29
Cx2	ECN NO:201210 Revise the PART NO.	Alice	2020/12/18

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK FEED THROUGH 10.0mm			頁數 Page	1/1
品號 PART NO.	C 5TF100N-0HSBXXXLX-02 D			繪圖 DRAWN	Mia 2017/02/13
圖號 DRAWING NO.	GN116-MC275	版本 REV.	E	核對 CHECKED	Jonny 2017/02/13
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/02/13
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	