

ORDER INFORMATION

ELECTRICAL





STANDARD: UL IEC
RATED VOLTAGE: 600V 750V
RATED CURRENT: 26A 41A
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 500MΩ / DC 500V
WITHSTANDING VOLTAGE: AC 2000V FOR ONE MINUTE
WIRE RANGE:20~10AWG 6mm²

MACHANICAL

TEMP.RANGE:-40°C~+105°C
TORQUE:0.5Nm(4.5Lb.in)
STEIP LENGTH:7-8mm

MATERIAL

HOUSING: PA66, UL94V-0
SCREWS:M3 STEEL,Zn PLATED
COPPER CYLINDER:SPCC,Zn PLATED

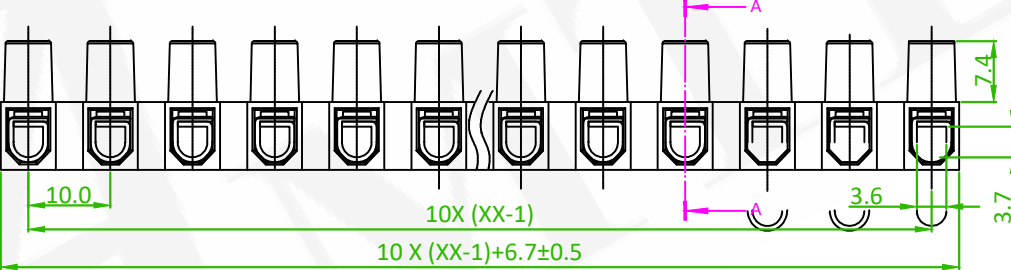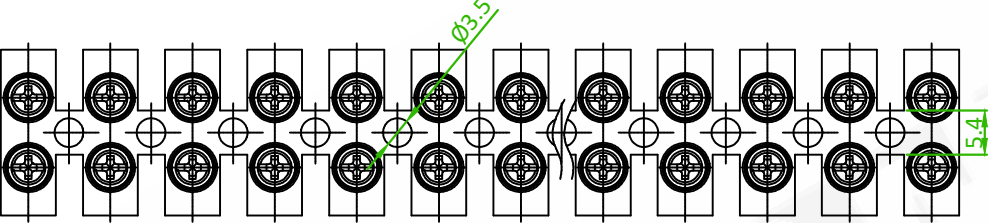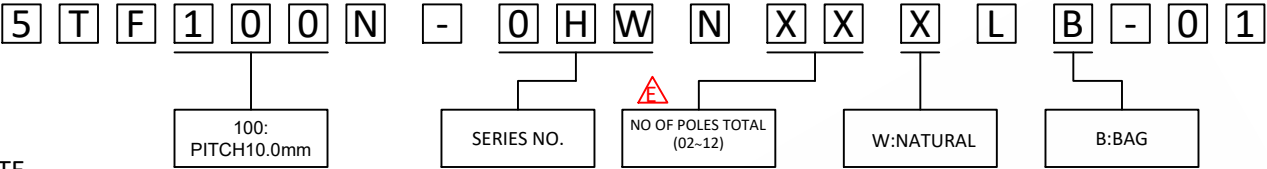

Section A-A



linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN 202502009	Willy	2025/03/11
△	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
△x2	ECN NO:201210 Revise the PART NO.	Alice	2020/12/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK FEED THROUGH 10.0mm				頁數 Page	1/1
品號 PART NO.	5TF100N-0HWNXXLX-01				繪圖 DRAWN	Mia 2017/07/28
圖號 DRAWING NO.	GN011-MC573	版本 REV.	E	核對 CHECKED	Caro 2017/07/28	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/07/28	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		