

ELECTRICAL  
STANDARD: UL IEC
RATED VOLTAGE: 600V 450V
RATED CURRENT: 20A 32A
CONTACT RESISTANCE:20mΩ
INSULATION RESISTANCE: 500MΩ / DC 500V
WITHSTANDING VOLTAGE: AC 2200V FOR ONE MIN
WIRE RANGE:20~12AWG 2.5mm²

MECHANICAL
TEMP. RANGE: -40°C ~ +105°C
STEIP LENGTH:7-8mm
TORQUE(MAX):0.4Nm

MATERIAL
HOUSING:NYLON66, UL94V-2
CAGE:COPPER ALLOY,M2.5/Ni PLATED
SCREW:STEEL,M2.5

ORDER INFORMATION

5

T

F

8

0

0

N

-

8

H

W

A

X

X

X

L

X

-

0

1


800:
PITCH 8.0mm

SERIES No.

 NO OF POLES TOTAL
(02~12P)

W:NATURAL

 B:BAG(2P~5P)
X:BOX(6P~12P)

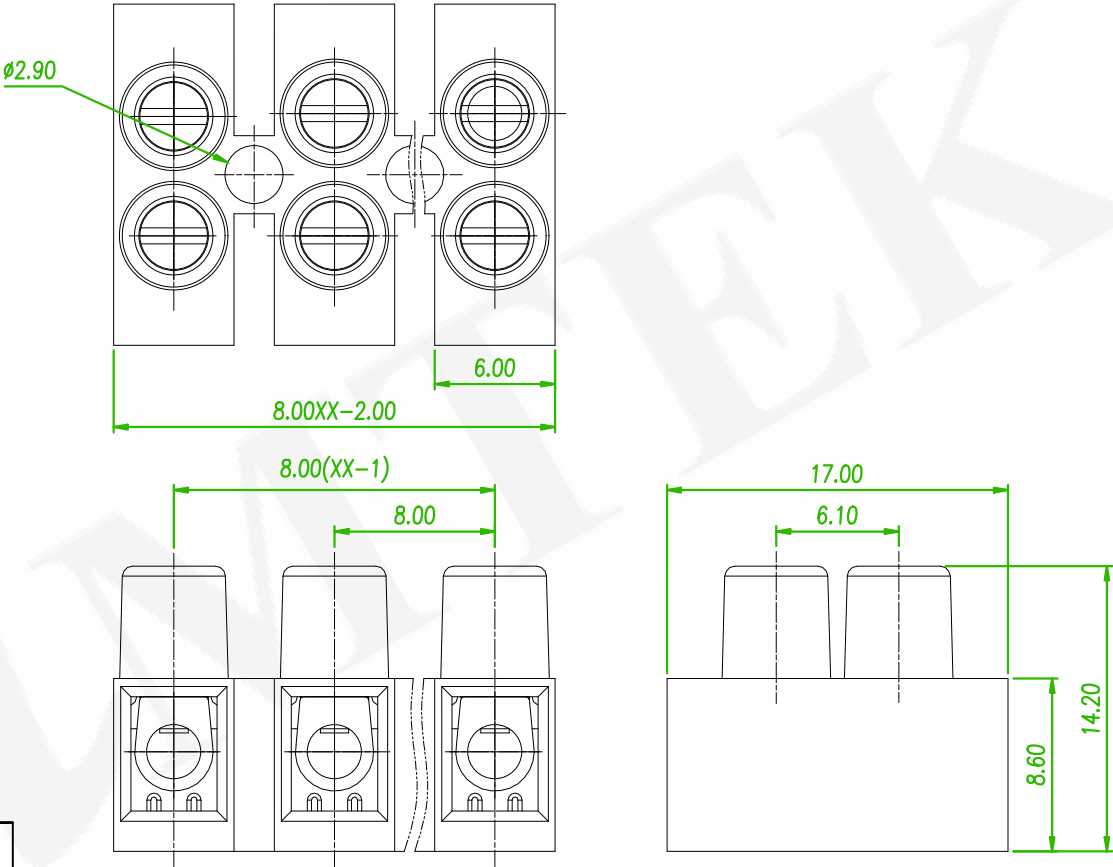

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN202502009	Willy	2025/03/06
	ECN NO:240348 Revise the drawing	Gaby	2024/12/02
	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK FEED THROUGH 8.00mm				頁數 Page	1/1
	品號 PART NO.	5TF800N-8HWAXXLX-01				繪圖 DRAWN	Mia 2016/04/19
	圖號 DRAWING NO.	GN011-MC072	版本 REV.	G	核對 CHECKED	Sabrina 2016/04/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/19	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		