

ORDER INFORMATION

5 T F 8 2 0 N - 8 H S A X X X L X - 0 1

820
PITCH:8.20mm


SERIES No.

NO OF POLES TOTAL
(02-12P)

W:NATURAL

B:BAG-2PIN~4PIN
X:BOX-5PIN~12PIN

HOUSING: NYLON66, UL94V-2
SCREW: STEEL,M2.5
CAGE:SPCC,M2.5/Zn PLATED

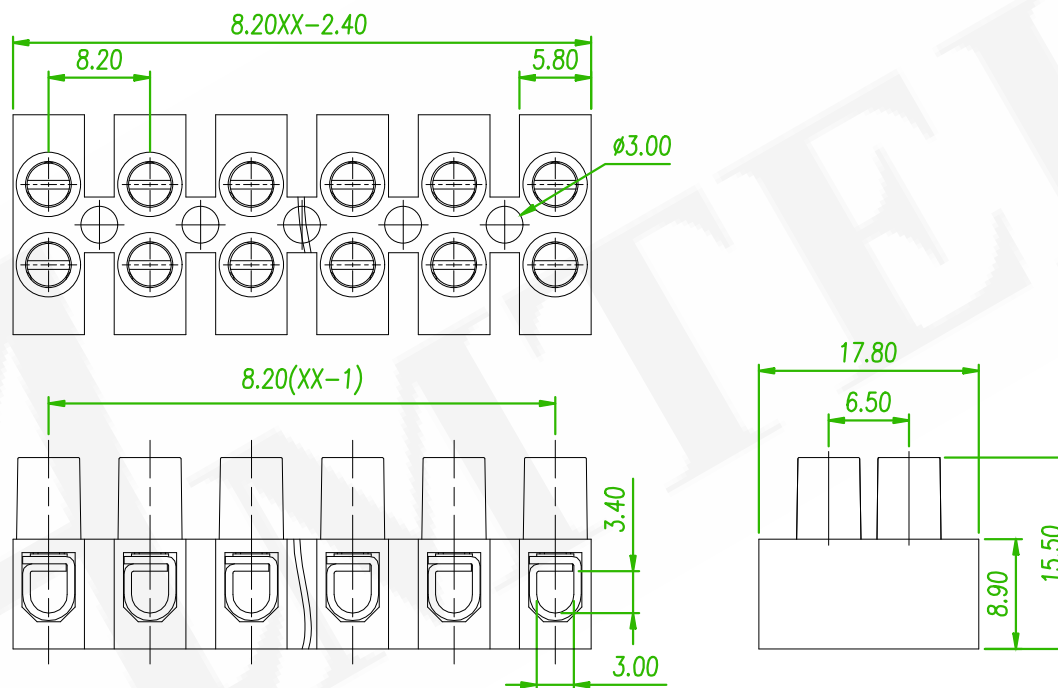

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN 202502009	Willy	2025/02/26
	ECN NO:240348 Revise the drawing	Gaby	2024/12/02
	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK FEED THROUGH 8.20mm				頁數 Page	1/1
品號 PART NO.	5TF820N-8HSAXXXLX-01			繪圖 DRAWN	Eric 2024/05/27	
圖號 DRAWING NO.	GN011-EA411	版本 REV.	G	核對 CHECKED	Josh 2024/05/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2024/05/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		