


SPECIFICATION



Current Rating: 1.0 A
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Voltage: 30V AC for one minute
Operation Temperature: -55°C to +105°C
material
Insulator: LCP, UL94V-0
Contact Pin: Brass
Shell: Cold Rolled Steel

ORDER INFORMATION

5 U M 2 B 0 1 S M - 1 0 5 S 0 B U A C 2

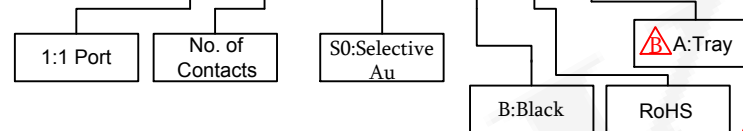

AMTEK 耀德
2020.07.03
Released DCC

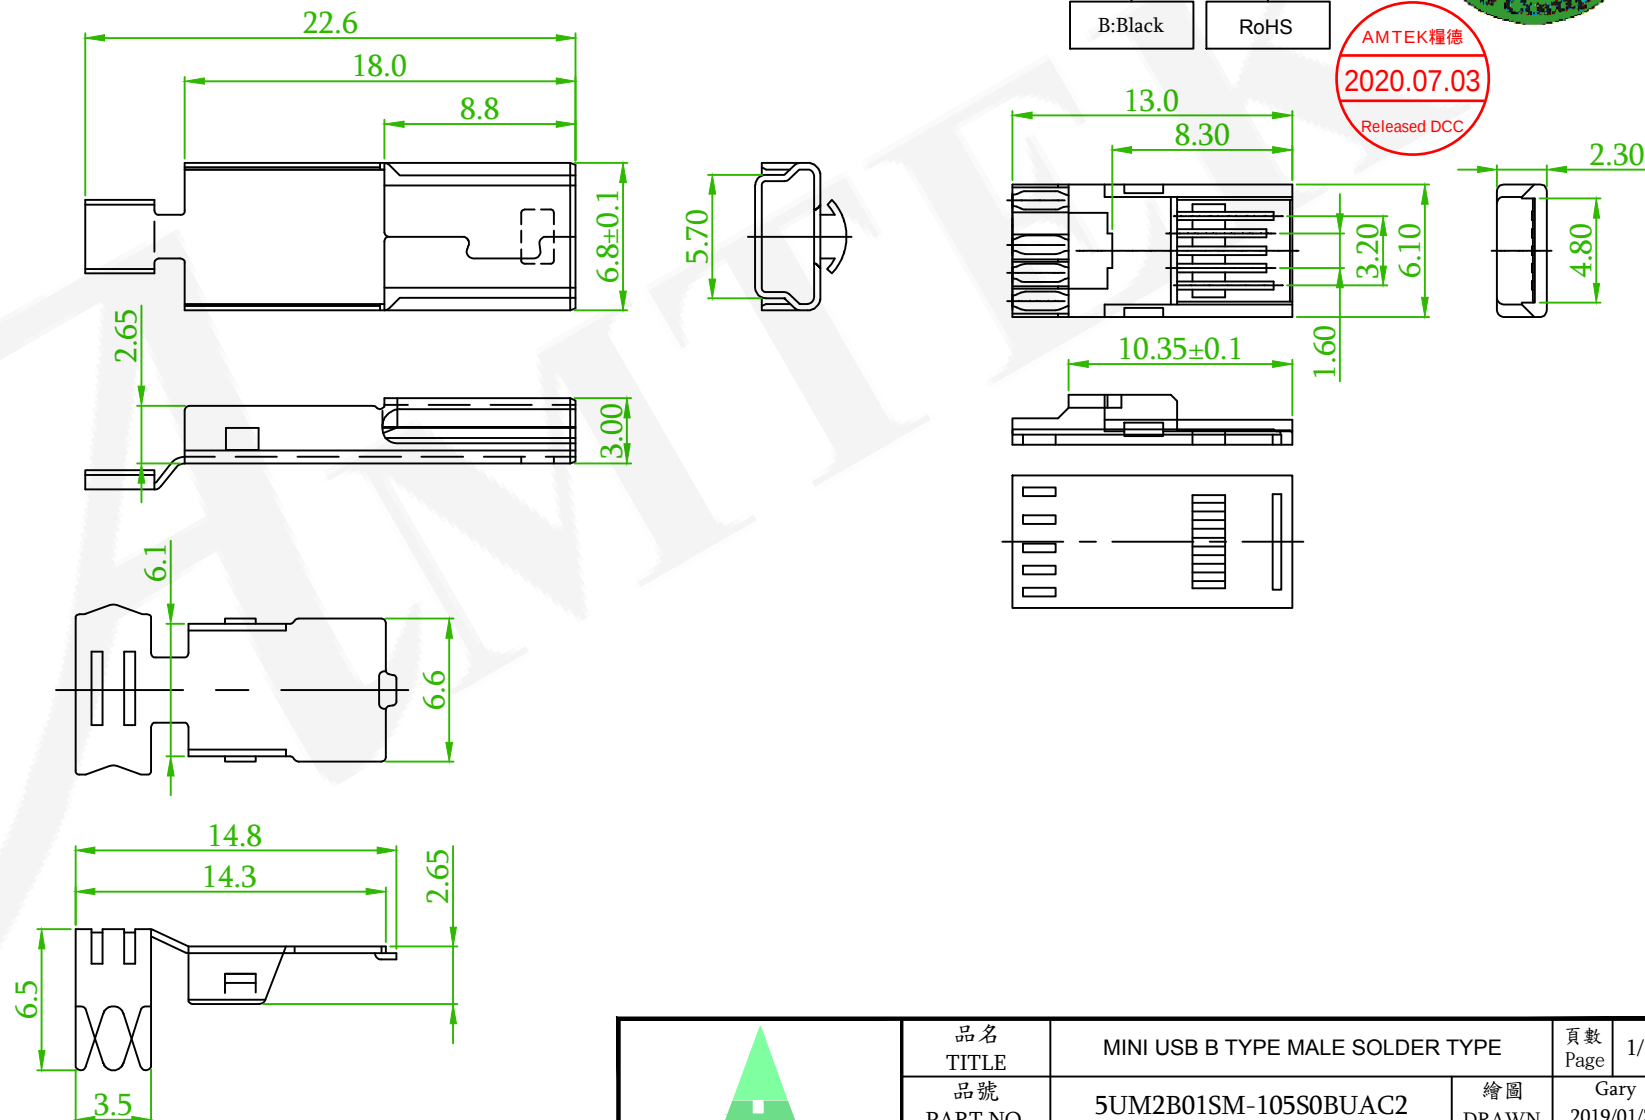

品名 TITLE	MINI USB B TYPE MALE SOLDER TYPE				頁數 Page	1/1
品號 PART NO.	5UM2B01SM-105S0BUAC2				繪圖 DRAWN	Gary 2019/01/30
圖號 DRAWING NO.	GW062-GB856	版本 REV.	B	核對 CHECKED	Josh 2019/01/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/30	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.: 200606 Revise the Package Bag->Tray	Alice	2020/06/22
	ECN NO. OR DESCRIPTION	REVISED	DATE