

Current Rating: 1 AMP
Voltage Rating: 30 V AC
Insulation Resistance: 1000M Ω Min.
Contact Resistance: 30m Ω Max
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -55 $^{\circ}$ C to +85 $^{\circ}$ C
Insertion Force: 35N Max
Withdrawal Force: 10N Min

Insulator: P.B.T, UL94V-0
Contact Pin: Brass

5 U S 2 A 0 4 D F - 1 0 4 X X X L A C 1

2:USB2.0

F:Female

1:1 Port




No. of contacts

S0:Selective Au
SD:Selective Au 30u"



W:White
B:Black

RoHS

A:Tray W/O Ca

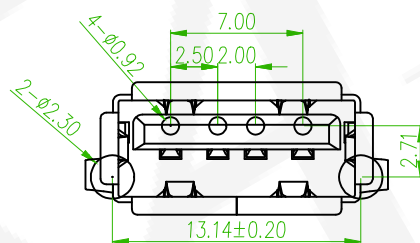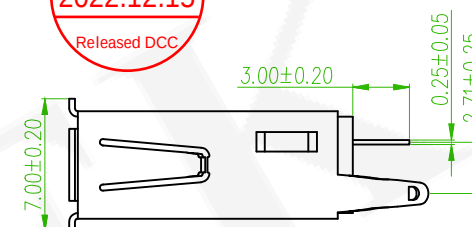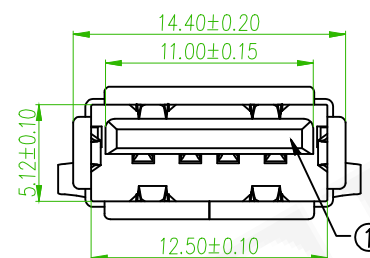

P.C.B LAYOUT

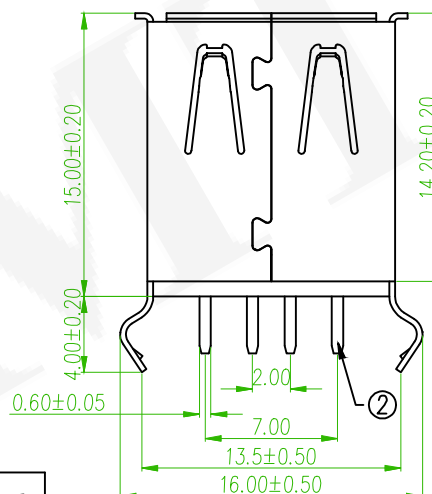

②	Housing	4	Brass	T=0.25mm	Contact Area: 0.8~1.2u" Gold Plated Over 40u" Nickel Min Solder Area: 80~120u" Tin Plated Over40u"Nickel Min.	
①	Housing	1	P.B.T  UL No.:E107536	UL94V-0	Black / White	
No.	Name	Q'ty	Material	Remarks & Thickness	Finish	
 Bx1	Add the UL Number				Alice	2022/12/15
REV.	ECN NO. OR DESCRIPTION				REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	USB A TPYE FEMALE DIP 180°				頁數 Page	1/1
品號 PART NO.	5US2A04DF-104XXXLAC1			繪圖 DRAWN	Kent 2007/01/08	
圖號 DRAWING NO.	GW062-EL439	版本 REV.	B	核對 CHECKED	Paul 2007/01/08	
客戶品號 CUSTOMER P/N			比例 SCALE	1 : 1	承認 APPROVED	James 2007/01/08
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20		單位 UNIT	mm	THIRD ANGLE PROJECTION	