
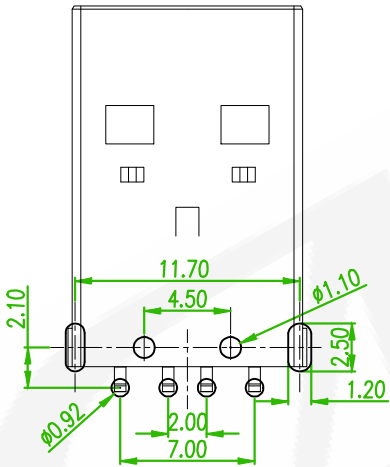





SPECIFICATION

CURRENT RATING: 1A MAX
DIELECTRIC VOLTAGE: 30V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m Ω MAX
INSULATION RESISTANCE: 1000MΩ MIN AT DC 500V
TEMPERATURE RANGE: -55℃ TO +105℃

ORDER INFORMATION

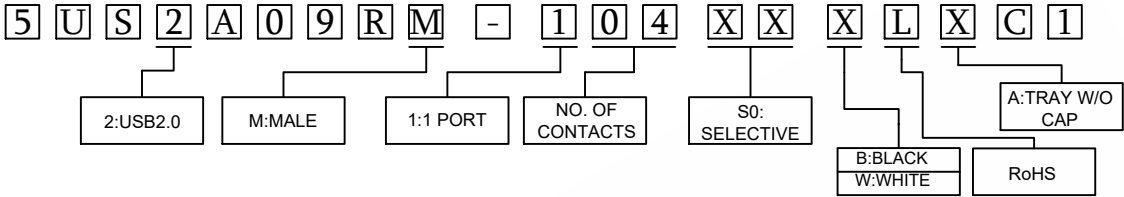

RECOMMENDED PCB LAYOUT (PCB TOLERANCE ±0.05)

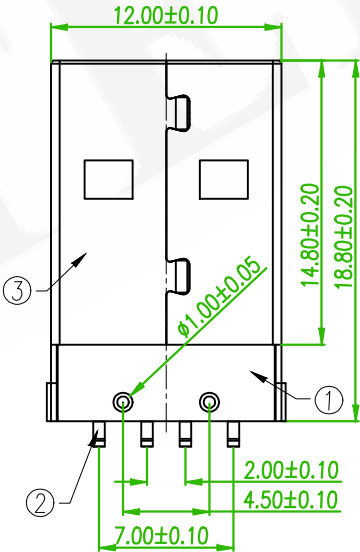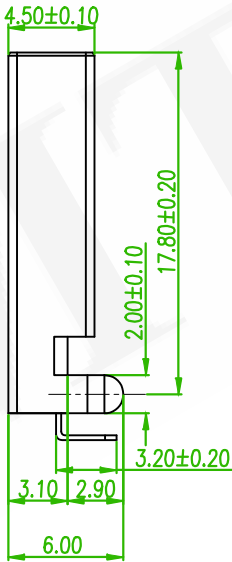

3	Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area:0.8~30u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	PBT	UL 94-V0	
No	Name	O'tv	Material	Remarks&Thickness	Finish

REV.	ECN NO. OR DESCRIPTION	REVISD	DATE
	ECN 202503052	Willy	2025/04/14

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	USB A MALE DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5US2A09RM-104XXXLXC1				繪圖 DRAWN	Jeff 2016/09/30
圖號 DRAWING NO.	GW062-WW229	版本 REV.	B	核對 CHECKED	Johnny 2016/09/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/30	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

Old Part No. :USB-001MD-AX-L