
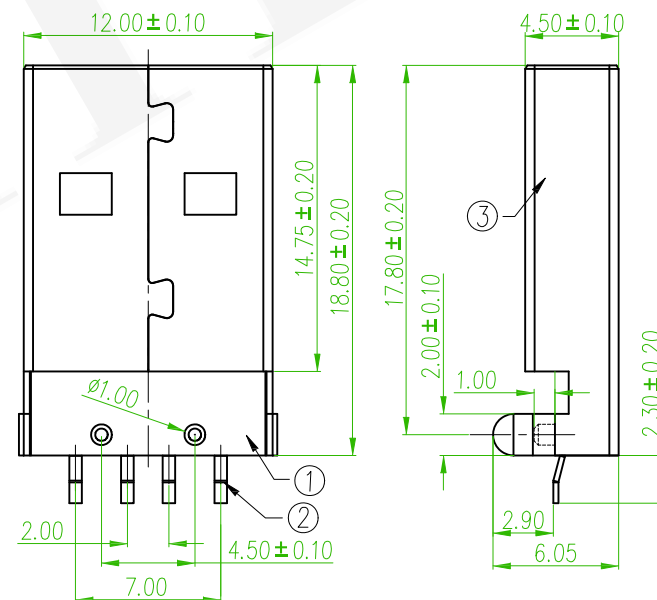

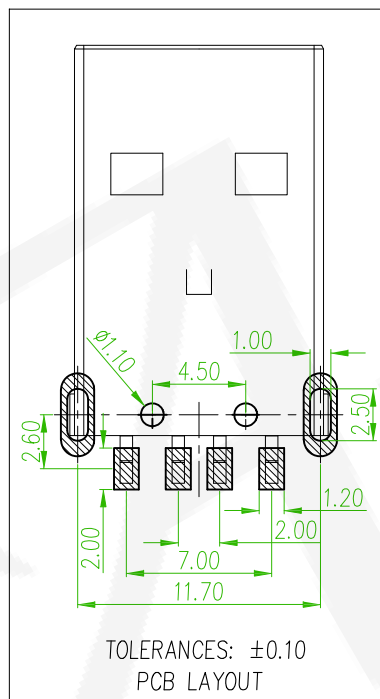



Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 30 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C.

ORDER INFORMATION

5 U S 2 A 1 2 M M - 1 0 4 S 0 X U X C 1

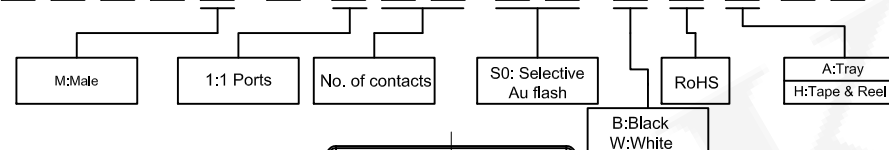

3	Shell	1	Cold rolled steel	T=0.30mm	Cu: 40u"min. 80u" min Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area: 0.8u" min Gold Plated over 40u"Nickel min. Solder area: 80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	LCP	UL 94-V0	Black/White
No.	Name	Q'ty	Material	Remark & Thickness	Finish

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	USB A TYPE MALE SMT TYPE				頁數 Page	1/1
品號 PART NO.	5US2A12MM-104S0XUXC1			繪圖 DRAWN	Jeff 2016/07/25	
圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Boris 2016/07/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/07/25	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		